



Coswick
Inspire

Coswick

SUPERB STABILITY
DESIGN SOLUTIONS
ECO-FRIENDLY

Superb Stability



BALANCED SYMMETRICAL CONSTRUCTION

Base and middle core of Coswick 3-layer flooring is made of Birch. Birch hardness is close to that of top layer made of Oak, Ash or American Walnut. Base layer thickness is extended to 3 mm providing perfect symmetry and balance and eliminating any chance of cupping and warping in case of temperature or humidity fluctuations.

CORK COMPENSATOR

Cork compensators are inserted into the middle core every 15 cm. In the event of moisture effect - cork compensators reduce stress in the middle core and improve stability and structural integrity of the hardwood flooring plank.

LONGLASTING PU HOT MELT BONDING GLUE

Innovative polyurethane hot-melt adhesive is used by Coswick to bond all 3-layers of engineered flooring planks. Extra strong, water-resistant and highly elastic – the glue excludes delamination of flooring planks even in the event of flooding! Polyurethane bonding does not age, so, the glue joint performance lasts during all the flooring life time. 100% Eco-Friendly – the glue does not contain added formaldehyde or any other hazardous substances at all.

HIGH PERFORMANCE CosLoc 5G

Innovative Valinge 5G click locking system CosLoc is used to create Coswick 3-layer floating floors. Middle core made of Birch and the use of Cork Compensators leaving no gaps ensure no splits and chips on the click surface providing very tight and reliable connection even in case of floating installation, as well as eliminating unwanted plank movement and squeaking during exploitation. Coswick 3-layer all hardwood construction is hard enough to withstand any deformation of the click during installation and further exploitation.

Design Solutions

- | OVER 120 UNIQUE COLORS IN 5 PROTECTIVE FINISHES
- | EXTENDED MOSAIC LINE: CHEVRON, HERRINGBONE, MOSAIC TILES AND PARQUETRY FLOORING
- | PERFECT SOLUTIONS FOR HIGH-END PUBLIC SPACES IN ANY CLIMATE ZONE



Eco - Friendly

All Coswick products are manufactured from natural wood, as well as only carefully selected high quality materials with strict requirements for ecological safety are used in company production process.

Finished Coswick products are regularly tested for formaldehyde content. According to European standard EN14342 formaldehyde emission of Coswick flooring corresponds to the safest class E1. What is more, the whole range of Coswick products either has No Added Urea Formaldehyde at all (NAUF) or meets ULEF requirements, as per American CARB ASTM standard. It means that the level of emissions of Volatile Substances of Coswick flooring is equal to that of natural wood.

DECLARATION ECO

At Coswick we strongly believe that Ecological Safety of hardwood flooring is just as important as its visual characteristics, durability and ease of maintenance.

Coswick hardwood floors are regularly tested for VOC emissions to ensure full compliance with highest environmental and ecological standards EN14342 (Class E1) and CARB ASTM (NAUF, ULEF).

FSC®(FSC C117884) certification is applied to all Coswick product lines, so, all the wood products manufactured by Coswick originate from raw timber harvested by forestries committed to environmentally and socially responsible logging. Ask for FSC-certified products.

Coswick Team work closely with local organizations, institutions and forestries with the aim to protect and maintain environment and forest reserves. We are proud to say that all timber used for flooring production is harvested using clean felling procedures and environmentally responsible practices that do not lead to reduction in oak and ash wood.

Operating a fully integrated manufacturing cycle - 100% of manufacturing waste (sawdust or wood chips) is recycled, burned in boilers for heating kiln dryers or pressed into wood briquettes widely used as fuel for home heating.

Completely Integrated

Factory

COSWICK IS A CANADIAN OWNED FLOORING COMPANY

Coswick is a Canadian owned flooring manufacturer with production facilities located in Zaslavl, Belarus. Our manufacturing process is completely integrated - starting with raw timber processing all the way to the end product. Coswick product lines include factory-prefinished ready-to-install hardwood flooring, wall panels, sports floors, decking & siding, as well as accessories. Company unique production process allows our Team to control quality at every stage of manufacture. Sawmills, Kiln dryers and UV finishing lines - all the machinery used by Coswick is state-of-the-art; operation - top talent available in the industry - altogether ensures the highest and utmost product quality.

1,000,000 sq. m.

Coswick Team numbers 600 people. Company's manufacturing capacity is over 1,000,000 sq. m. per year and about 90% of all the products are exported globally. Coswick dealer network spans over 45 countries, including Canada, USA, European Union, the Persian Gulf region, Russia, China, Australia etc.

COSWICK PRODUCTION PROGRAM

Coswick manufacturing program includes highly stable 3-layer single strip T&G and click flooring, solid hardwood floors, as well as chevron, herringbone, uniblock, parquetry and mosaic flooring. Product selection also includes sports floors, decorative wall & ceiling panels, acoustic panelling systems, decking & siding, as well as a complete line of care & maintenance products, coatings for on-site finishing and adhesives for flooring installation.

Coswick Hardwood Floors:

PLANK FLOORING

Classic Collection..... 14
 Brushed & Oiled Collection..... 16
 Country Collection..... 18
 Signature Collection..... 20
 Heritage Collection..... 22
 Arts & Crafts Collection..... 24
 Wide Plank Flooring..... 26

MOSAIC FLOORING

Chevron Collection 30
 Chevron Collection CosLoc..... 32
 Herringbone Collection..... 34
 Mosaic Flooring..... 36
 Parquetry Flooring..... 40
 Uniblock Flooring Collection..... 40

SPORTS FLOORING


Tournament Pro Sport..... 44
 Tournament Sport..... 44
 Matrix Sport..... 44
 Fitness Board..... 44
 Portable Mosaic Dance..... 44

WOOD WALL PANELS

Acoustic Wall Panels..... 48
 Decorative Wall Panels..... 50

TECHNICAL INFORMATION

Technologies..... 54
 Finishing Systems..... 56
 Grades..... 58
 Technical Information..... 60
 Moldings..... 65
 Floor Care Products..... 66

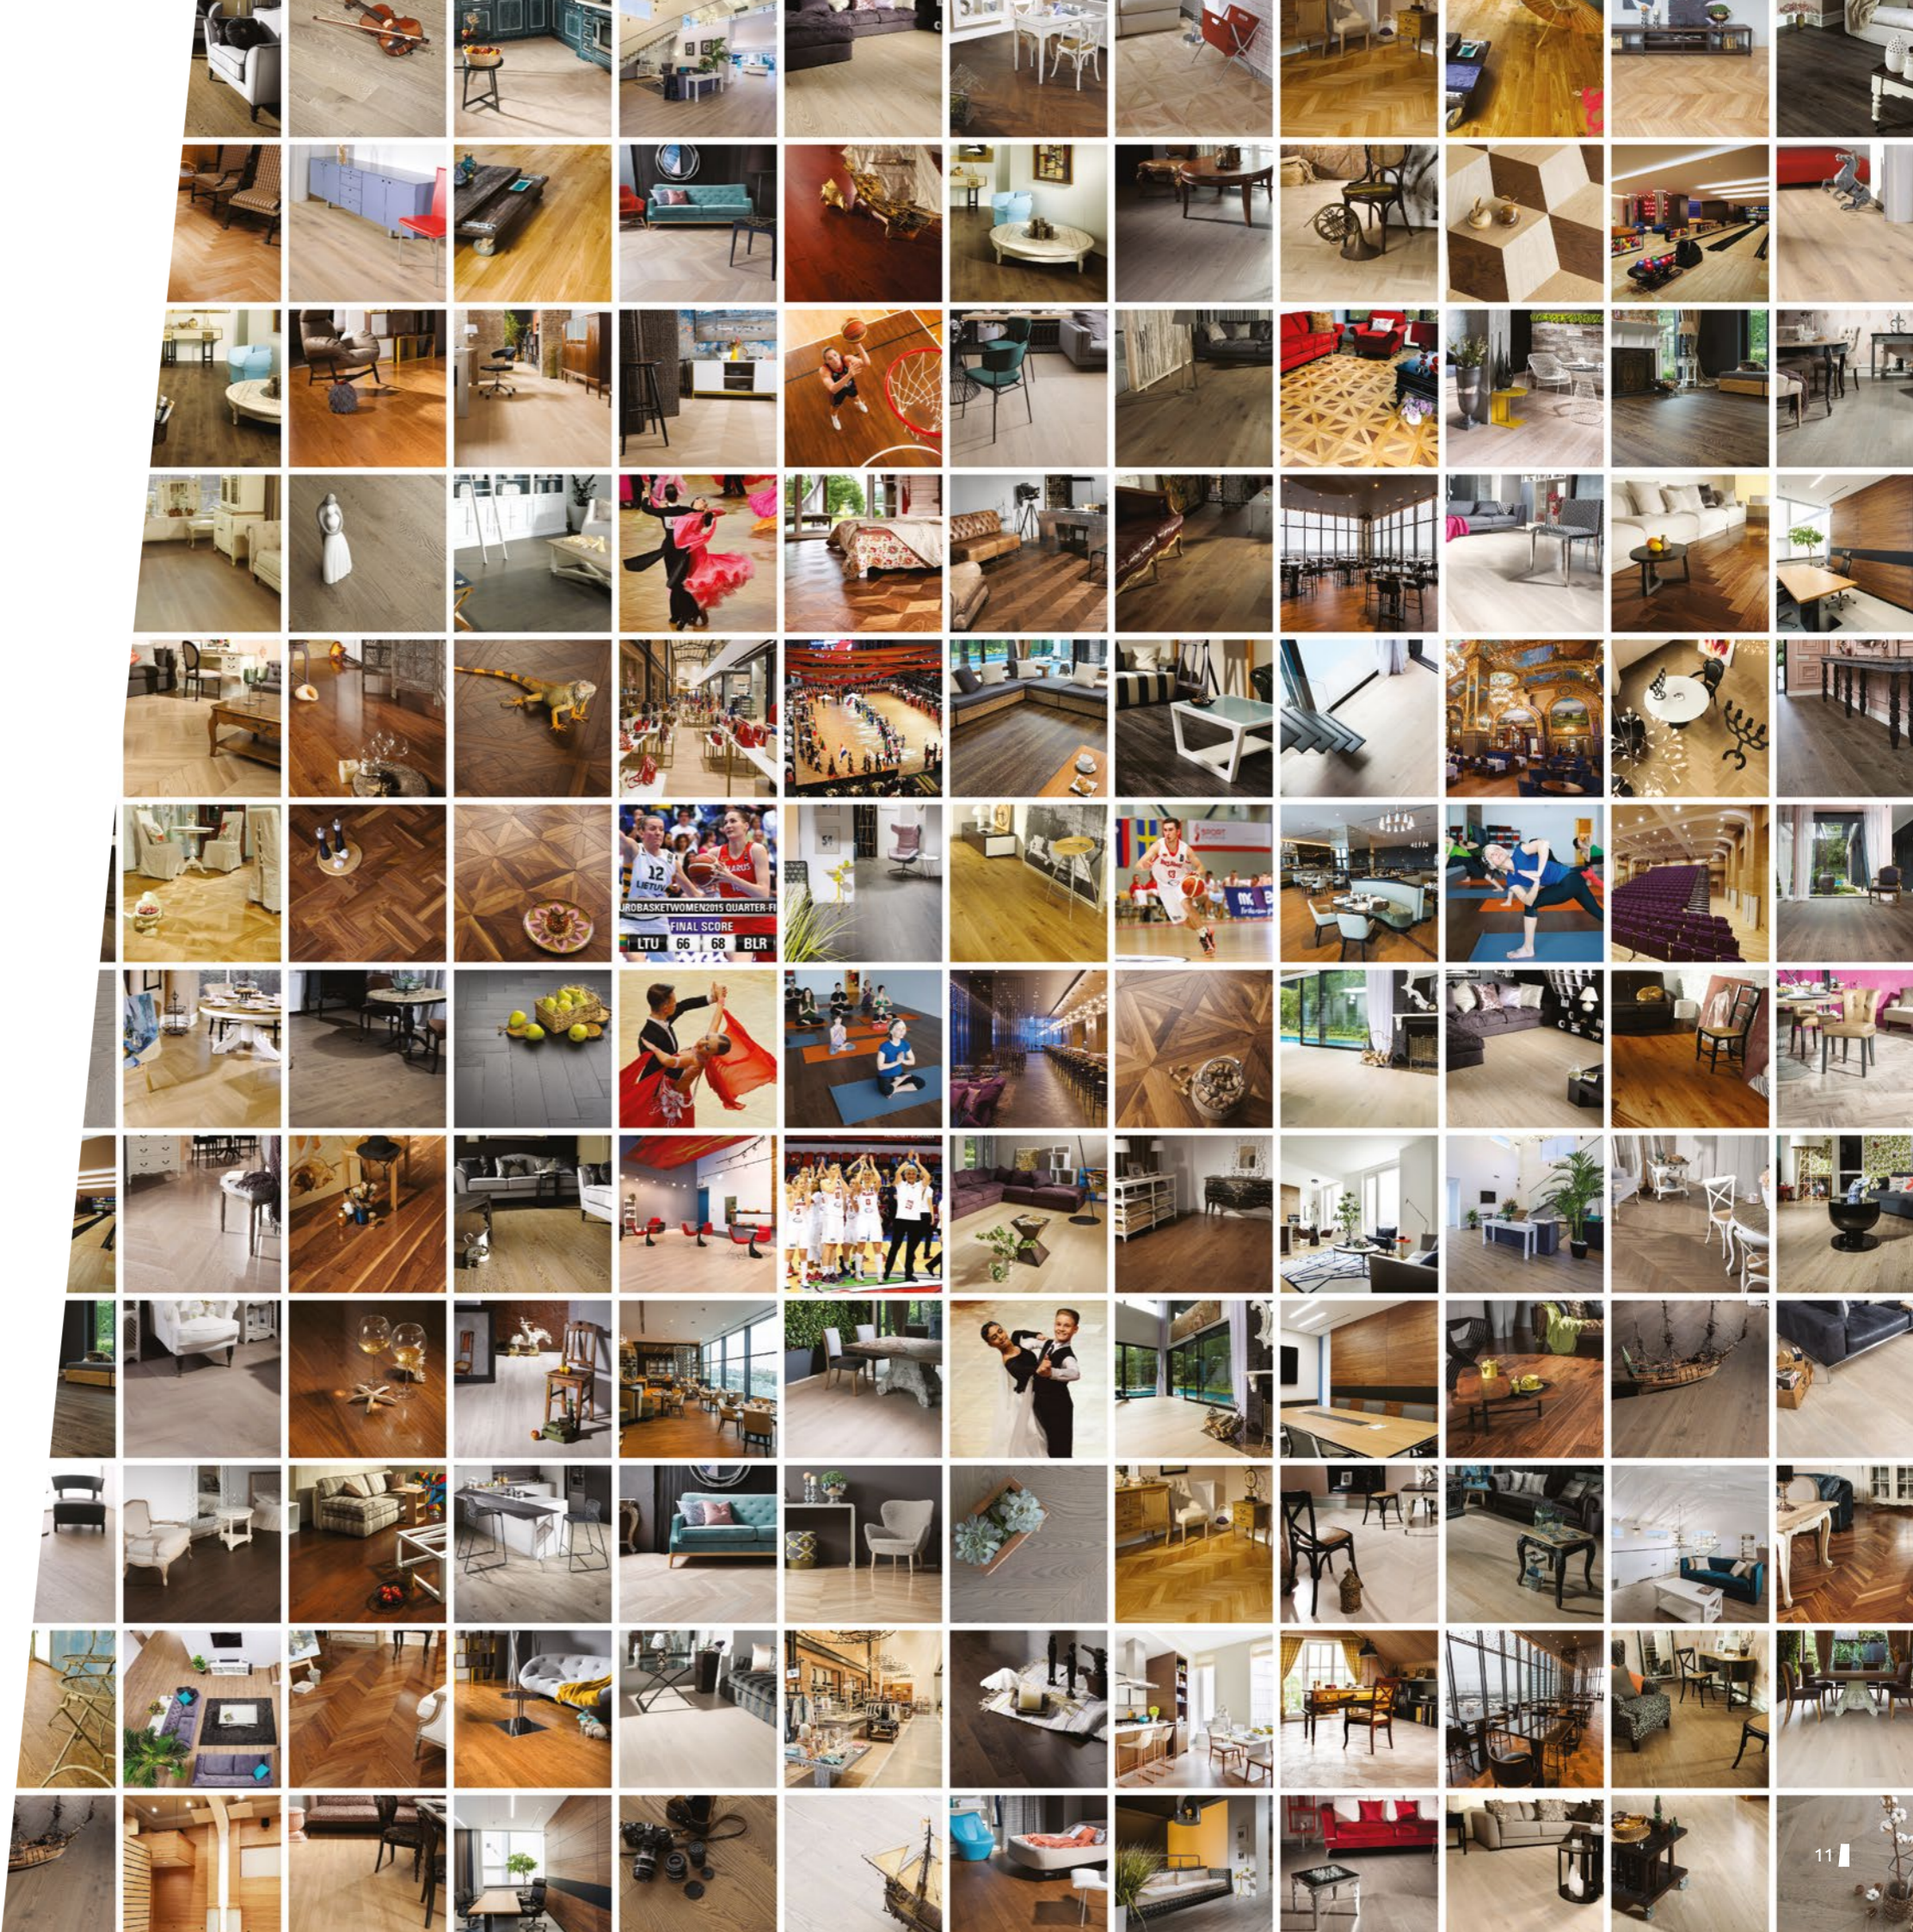




- | Classic Collection
- | Brushed & Oiled Collection
- | Country Collection
- | Signature Collection
- | Heritage Collection
- | Arts & Crafts Collection
- | Wide Plank Flooring



CLASSIC COLLECTION

FINISH :


-  Lacquer
-  Silk Oil
-  Silk Oil ultra matte

GRADE :



- S&B** Select & Better
- 1N** 1 Natur
- Trad** Traditional


CONSTRUCTION :


3-layer T&G engineered flooring




3-layer single strip flooring CosLoc 5G




1.1 | VANILLA | OAK  **S&B**





1.2 | NATURAL | OAK  **S&B**





1.3 | ROSE | OAK  **S&B**




1.4 | CHESTNUT | OAK  **S&B**



1.5 | WALNUT | OAK  **S&B**




1.6 | CHARCOAL | OAK  **S&B**





1.7 | MOONLIGHT | ASH  **S&B**






1.8 | LAVENDER | ASH  **S&B**




1.9 | CARAMEL | ASH  **S&B**



1.10 | NATURAL | A. WALNUT   **S&B**



1.11 | NATURAL | A. WALNUT   **Trad**



1.12 | CLASSIC | A. WALNUT   **1N**



BRUSHED & OILED COLLECTION

FINISH :

- 🔥 Silk Oil
- 🔥 Silk Oil ultra matte

GRADE :


- S&B** Select & Better
- 1N** 1 Common
- Tav** Tavern

CONSTRUCTION :

3-layer T&G engineered flooring




3-layer single strip flooring CosLoc 5G




2.1 | WHITE FROST | OAK

🔥 **S&B**




2.2 | VANILLA | OAK

🔥 **S&B**



2.3 | CHABAUD | OAK

🔥 **S&B**




2.4 | NATURAL | OAK

🔥 **S&B**



2.5 | CHESTNUT | OAK

🔥 **S&B**




2.6 | CINNAMON | OAK

🔥 **S&B**




2.7 | CLOUDY | ASH

🔥 **1C**



2.8 | NORMAN BREEZE | ASH

🔥 **Tav**




2.9 | FRENCH RIVIERA | ASH

🔥 **1C**




2.10 | GREY CLOUD | ASH

🔥 **Tav**



2.11 | CANADIAN CEDAR | ASH

🔥 **1C**



2.12 | MOCCA | ASH

🔥 **1C**

COUNTRY COLLECTION

FINISH :


- 🔥 Silk Oil
- 🔥 Silk Oil ultra matte

GRADE :


- 1C** 1 Common
- Tav** Tavern
- 1N** 1 Natur
- Char** Character

CONSTRUCTION :

3-layer T&G engineered flooring



3-layer single strip flooring CosLoc 5G




3.1 | NATURAL | OAK

🔥 1C 1N



3.2 | FRENCH ESTATE | OAK

🔥 Tav Char




3.3 | CHESTNUT | OAK

🔥 1C 1N




3.4 | AMBER | OAK

🔥 Tav Char



3.5 | MILK CHOCOLATE | OAK

🔥 1C 1N



3.6 | BROWN SUGAR | OAK

🔥 1C 1N



3.7 | ALPINE | OAK

🔥 Tav Char




3.8 | SNOWDROP | OAK

🔥 Tav Char



3.9 | GREY ASH | OAK

🔥 1N




3.10 | ROCKY REEF | OAK

🔥 Tav Char



3.11 | CHAMBORD | OAK

🔥 1C 1N



3.12 | DARK CHOCOLATE | OAK

🔥 Tav Char



SIGNATURE COLLECTION

FINISH :


💧 Lacquer matte

GRADE :


S&B Select & Better

CONSTRUCTION :

3-layer T&G engineered flooring




3-layer single strip flooring CosLoc 5G



4.1 | ALBATROSS | OAK

💧 S&B




4.2 | CHAMBORD | OAK

💧 S&B




4.3 | NORD SEA | OAK

💧 S&B




4.4 | SANDY | OAK

💧 S&B



4.5 | STONEY CREEK | OAK

💧 S&B




4.6 | CHARCOAL | OAK

💧 S&B




4.7 | MOONLIGHT | ASH

💧 S&B



4.8 | ATLANTIC | ASH

💧 S&B




4.9 | SILVERY | ASH

💧 S&B




4.10 | PEARL GREY | ASH

💧 S&B



4.11 | TIGER EYE | ASH

💧 S&B



4.12 | CAPPUCCINO | ASH

💧 S&B



HERITAGE COLLECTION

FINISH :


- 🔥 Silk Oil
- 🔥 Silk Oil ultra matte

GRADE :




- 1C** 1 Common
- Tav** Tavern
- 1N** 1 Natur
- Char** Character

CONSTRUCTION :


3-layer T&G engineered flooring



3-layer single strip flooring CosLoc 5G




5.1 | CRYSTAL WHITE | OAK 🔥 Tav Char




5.2 | IVORY | OAK 🔥 Tav Char



5.3 | GREY VELVET | OAK 🔥 Tav Char



5.4 | ANTIQUE PATINA | OAK 🔥 Tav Char



5.5 | GREY CASHMERE | OAK 🔥 Tav Char




5.6 | RAUCHTÖPAŽ | OAK 🔥 Tav Char




5.7 | PASTEL | OAK 🔥 1C 1N



5.8 | FRENCH GOBELIN | OAK 🔥 Tav Char




5.9 | VINTAGE BROWN | OAK 🔥 Tav Char



5.10 | INDIGO | OAK 🔥 Tav Char



5.11 | GRAPE SEED | OAK 🔥 Tav Char



5.12 | TERRA | OAK 🔥 Tav Char

ARTS & CRAFTS COLLECTION

FINISH :

- 🔥 Silk Oil ultra matte
- 🌿 Hardwax Oil

GRADE :


Char Character

CONSTRUCTION :


3-layer T&G engineered flooring



3-layer single strip flooring CosLoc 5G




6.1 | BATISTE | OAK 🔥🌿 Char




6.2 | VIENNA | OAK 🔥🌿 Char




6.3 | GENEVA | OAK 🔥🌿 Char



6.4 | SCANDINAVIAN | OAK 🔥🌿 Char



6.5 | OLD VENICE | OAK 🔥🌿 Char



6.6 | LONDON | OAK 🔥🌿 Char



6.7 | BARCELONA | OAK 🔥🌿 Char



6.8 | STONEHENGE | OAK 🔥🌿 Char



6.9 | ALBION | OAK 🔥🌿 Char



6.10 | HEATHER | OAK 🔥🌿 Char



6.11 | MISTY FJORDS | OAK 🔥🌿 Char






6.12 | MARSEILLE | OAK 🔥🌿 Char



WIDE PLANK FLORING

FINISH :



-  Resilient Lacquer
-  Silk Oil ultra matte
-  Hardwax Oil

GRADE :

Char Character


CONSTRUCTION :

3-layer T&G engineered flooring

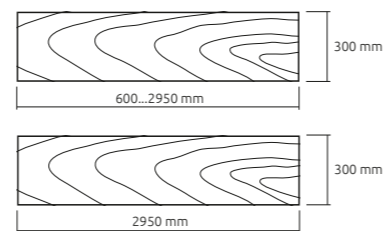


7.1 | SNOWDROP | OAK

 Char



7.2 | VANILLA | OAK

 Char




7.3 | BATISTE | OAK

 Char



7.4 | GRAPE SEED | OAK

 Char



7.5 | MARSEILLE | OAK

 Char




7.6 | OLD VENICE | OAK

 Char




7.7 | NATURAL | OAK

  Char



7.8 | NATURAL | OAK

 Char




7.9 | MILK CHOCOLATE | OAK

 Char




- | Chevron Collection
- | Chevron Collection CosLoc
- | Herringbone Collection
- | Mosaic Flooring
- | Parquetry Flooring
- | Uniblock Flooring Collection

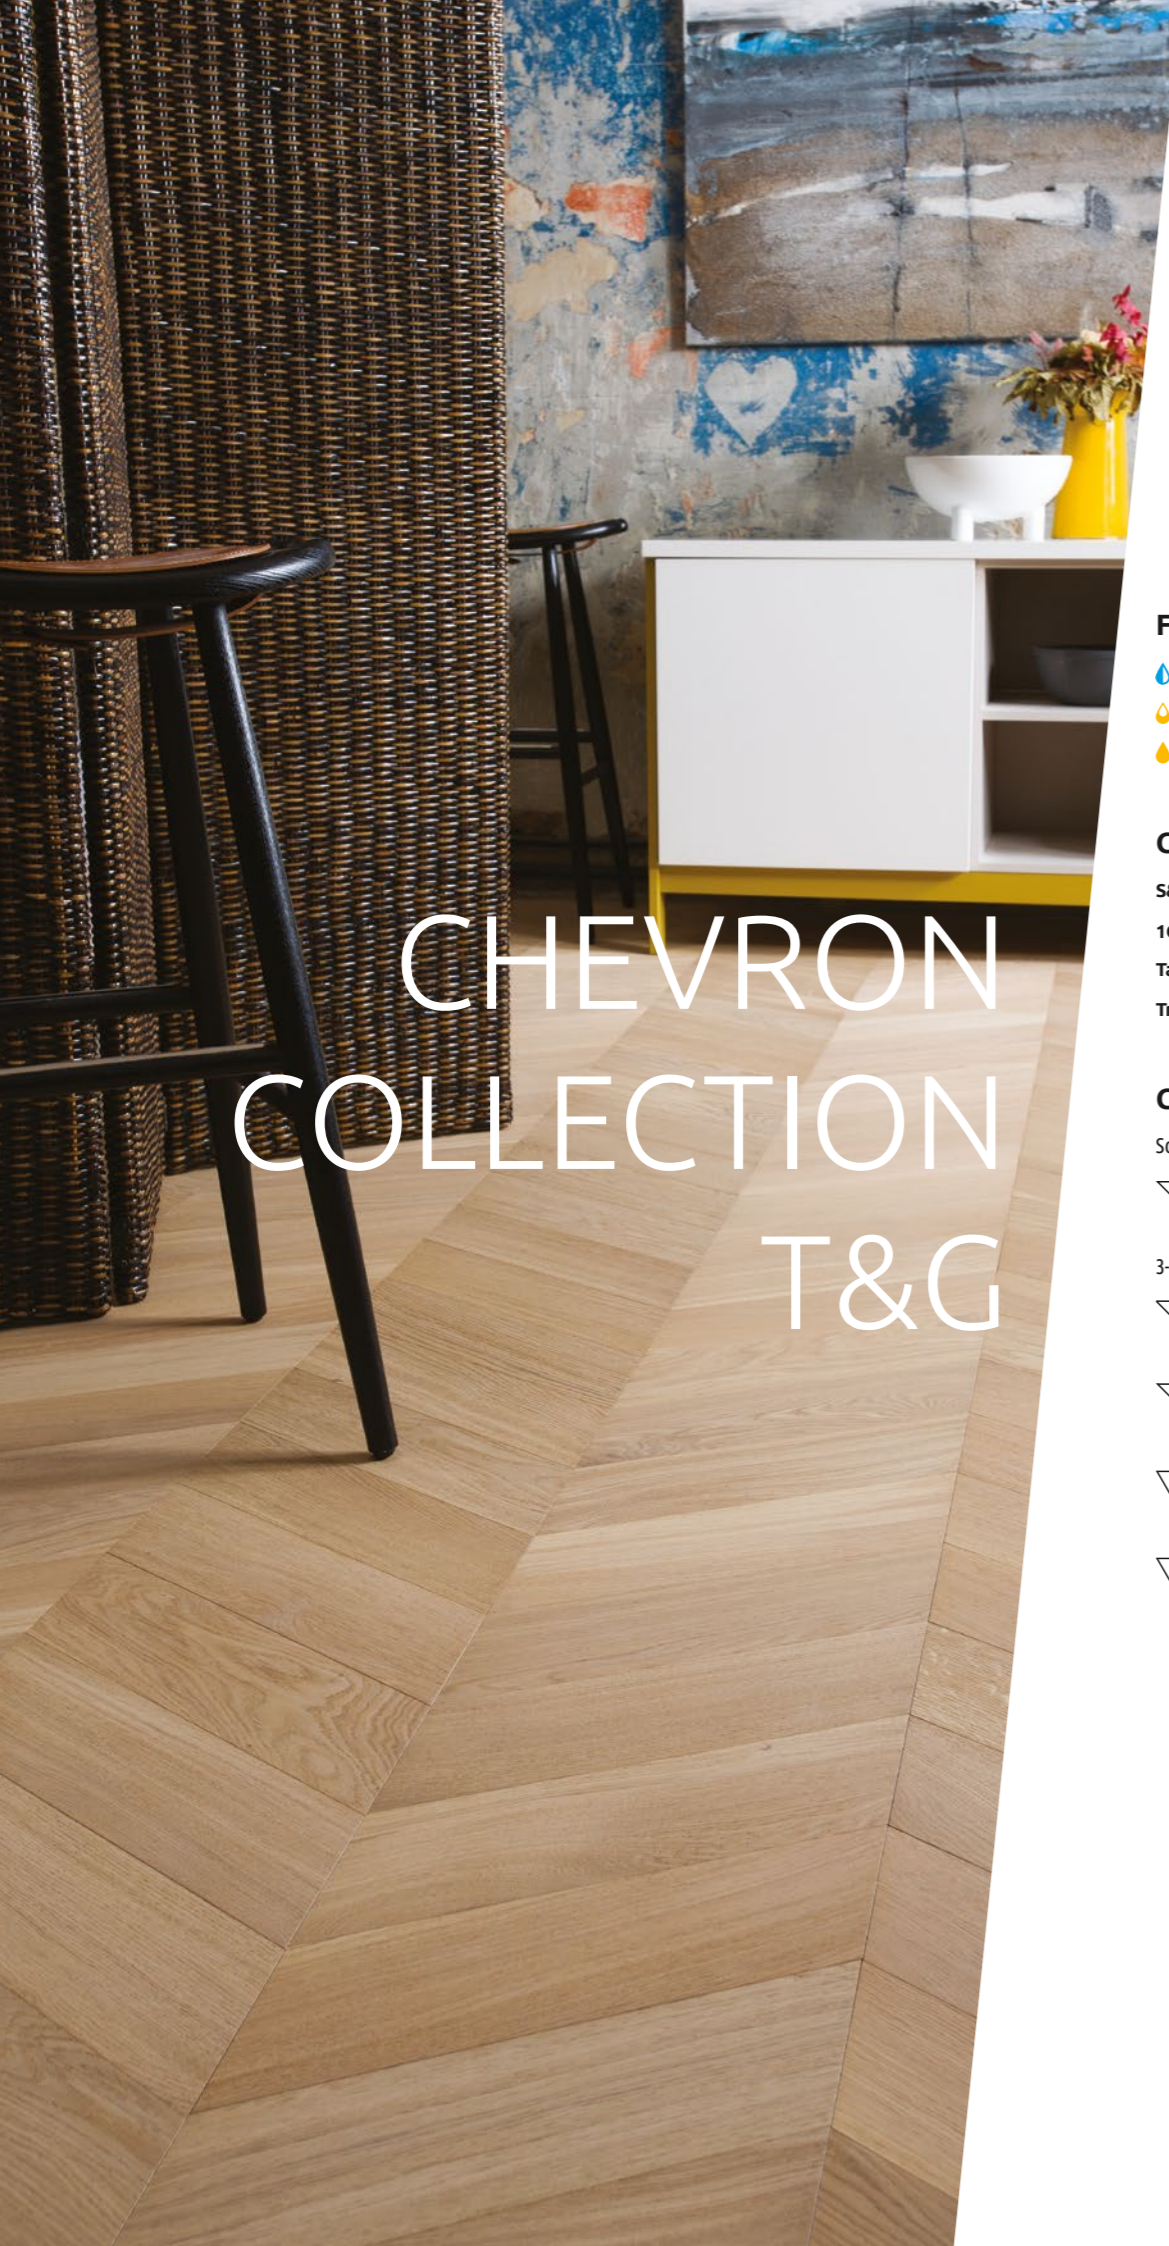



CHEVRON COLLECTION T&G

FINISH :


-  Lacquer
-  Silk Oil
-  Silk Oil ultra matte

GRADE :





- S&B** Select & Better
- 1C** 1 Common
- Tav** Tavern
- Trad** Traditional

CONSTRUCTION :

Solid hardwood flooring



3-layer T&G engineered flooring



8.1 | ALPINE | OAK




Tav



8.2 | MOONLIGHT | ASH




S&B



8.3 | NORMAN BREEZE | ASH



Tav



8.4 | WHITE FROST | OAK




S&B



8.5 | PEARL GREY | ASH



S&B



8.6 | CHAMBORD | OAK



1C



8.7 | PASTEL | OAK



S&B

1C



8.8 | ROCKY REEF | OAK




Tav



8.9 | FRENCH RIVIERA | ASH




1C



8.10 | NATURAL | OAK




S&B



8.11 | MILK CHOCOLATE | OAK




1C



8.12 | CHARCOAL | OAK




Tav



8.13 | NATURAL | A. WALNUT



S&B



8.14 | NATURAL | A. WALNUT






Trad



CHEVRON COLLECTION CosLoc

FINISH :



-  Lacquer
-  Silk Oil
-  Silk Oil ultra matte


GRADE :


- S&B** Select & Better
- 1C** 1 Common
- Tav** Tavern
- Trad** Traditional


CONSTRUCTION :

3-layer single strip flooring CosLoc 5G




9.1 | ALPINE | OAK  **Tav**




9.2 | WHITE FROST | OAK  **S&B**




9.3 | PASTEL | OAK  **1C**



9.4 | MILK CHOCOLATE | OAK  **1C**



9.5 | NATURAL | A. WALNUT  **S&B**






9.6 | NATURAL | A. WALNUT  **Trad**



HERRINGBONE COLLECTION

FINISH :

-  Lacquer
-  Silk Oil
-  Silk Oil ultra matte

GRADE :


- S&B** Select & Better
- 1C** 1 Common
- Tav** Tavern
- Trad** Traditional

CONSTRUCTION :


Solid hardwood flooring



3-layer T&G engineered flooring




10.1 | ALPINE | OAK  **Tav**



10.2 | WHITE FROST | OAK   **S&B**



10.3 | MOONLIGHT | ASH  **S&B**



10.4 | VANILLA | OAK  **S&B**




10.5 | PEARL GREY | ASH  **S&B**




10.6 | GREY CASHMERE | OAK  **Tav**



10.7 | NORMAN BREEZE | ASH  **Tav**





10.8 | CHAMBORD | OAK  **1C**





10.9 | FRENCH RIVIERA | ASH  **1C**




10.10 | PASTEL | OAK  **S&B 1C**





10.11 | ROCKY REEF | OAK  **Tav**






10.12 | CHARCOAL | OAK  **Tav**




10.13 | CHESTNUT | OAK  **S&B**





10.14 | NATURAL | A. WALNUT   **S&B Trad**



10.15 | MILK CHOCOLATE | OAK  **1C**

MOSAIC FLOORING

FINISH :

-  Resilient Lacquer
-  Hardwax Oil combi


GRADE :

- S&B** Select & Better
- 1N** 1 Natur
- Trad** Traditional


CONSTRUCTION :

2-layer T&G engineered flooring

VERSAILLES




TRIANON




11.1 | NATURAL | OAK  S&B




11.2 | MARSEILLE | OAK  S&B



11.3 | OLD VENICE | OAK  S&B




11.4 | NATURAL | A. WALNUT  S&B




11.5 | NATURAL | A. WALNUT  Trad




11.6 | CLASSIC | A. WALNUT  1N




12.1 | NATURAL | OAK  S&B




12.2 | MARSEILLE | OAK  S&B




12.3 | OLD VENICE | OAK  S&B



12.4 | NATURAL | A. WALNUT  S&B





12.5 | NATURAL | A. WALNUT  Trad



12.6 | CLASSIC | A. WALNUT  1N

MOSAIC FLOORING

FINISH :

-  Resilient Lacquer
-  Hardwax Oil combi


GRADE :

- S&B** Select & Better
- 1N** 1 Natur
- Trad** Traditional


CONSTRUCTION :

2-layer T&G engineered flooring

LANGEAIS



CHEVERNY



13.1 | NATURAL | OAK



S&B



13.2 | NATURAL | OAK & A. WALNUT



S&B



13.3 | OLD VENICE | OAK



S&B



13.4 | NATURAL | A. WALNUT



S&B



13.5 | NATURAL | A. WALNUT




Trad



13.6 | CLASSIC | A. WALNUT




1N



14.1 | NATURAL | OAK




S&B



14.2 | NATURAL | OAK & A. WALNUT



S&B



14.3 | OLD VENICE | OAK




S&B



14.4 | NATURAL | A. WALNUT




S&B



14.5 | NATURAL | A. WALNUT



Trad



14.6 | CLASSIC | A. WALNUT





1N



PARQUETRY & UNIBLOCK

FINISH :

-  Lacquer
-  Silk Oil

GRADE :

- S&B** Select & Better
- Tav** Tavern
- Trad** Traditional


CONSTRUCTION :

3-layer engineered flooring



TILE




PYRAMID



Solid hardwood flooring




PARQUETRY :



15.1 | WHITE FROST | OAK

 **S&B**



15.2 | GREY CASHMERE | OAK

 **Tav**




15.3 | PASTEL | OAK

 **S&B**




15.4 | CHAMBORD | OAK

 **Tav**



15.5 | MILK CHOCOLATE | OAK


 **Tav**



15.6 | NATURAL | A. WALNUT


 **S&B Trad**

UNIBLOCK :




16.1 | NATURAL | OAK

 **S&B**




16.2 | ROSE | OAK

 **S&B**



16.3 | CHESTNUT | OAK

 **S&B**



16.4 | MILK CHOCOLATE | OAK

 **1C**

- | Tournament Pro Sport
- | Tournament Sport
- | Matrix Sport
- | Fitness Board
- | Portable Mosaic Dance

“A big part of my life is spent on sports hardwood floors and I know it too well how important performance of sports flooring for professional athletes.”

Anastasiya Verameyenka,
a famous Belarusian basketball player



SPORTS AND EVENTS FLOORING

Coswick line of sports hardwood floors provides excellent flooring solutions for a wide range of public and sports interiors, including:

Indoor sports courts used for training and competitions of all types, including international tournaments and team sports such as basketball, volleyball, handball, squash etc.

All types of gyms and interiors used for fitness and physical activity, including training in team sports.

Fitness centers, yoga and aerobics studios, dance halls and choreographic studios.

Temporary floor covering solutions for holding sport dance competitions, exhibits, presentations and other public events.

Coswick sports flooring is designed in full compliance with the norms and standards of sports flooring manufacturing (European Standard EN14904, German DIN 18032-2, American ASTM F2772) and ensures safety, comfort and effectiveness during training and sports competitions of all types.



TOURNAMENT PRO SPORT




TOURNAMENT SPORT



MATRIX SPORT



FITNESS BOARD

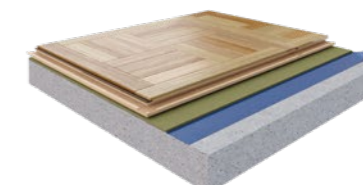

PORTABLE MOSAIC DANCE

FEATURES OF COSWICK SPORTS FLOORING

TECHNICAL CHARACTERISTIC	Sports Flooring Construction Type				
	TOURNAMENT PRO SPORT	TOURNAMENT SPORT	MATRIX SPORT	FITNESS BOARD	PORTABLE MOSAIC DANCE
Type of floor	Area-Elastic A4 (EN14904)	Area-Elastic A4 (EN14904)	Area-Elastic A4 (EN14904)	Area-Elastic A4 (EN14904)	Area-Elastic A3 (EN14904)
Construction height, mm	71	53	43	28	30
Species	Oak, Ash, Hard Maple	Oak, Ash, Hard Maple	Oak, Ash	Oak, Ash	Oak
Hardwood flooring dimensions, mm	57,15x300...1845 82,55x300...1845	57,15x300...1845 82,55x300...1845	107,95x300...1845 127x300...1845	107,95x300...1845	570x570
Hardwood flooring thickness, mm	19,05	19,05	16	12,7	19,05
Color / Finish	Natural / Resilient Sport Lacquer	Natural / Resilient Sport Lacquer	Natural / Resilient Sport Lacquer	Natural / Silk Oil	Natural / Silk Oil
Shock absorption, %	66 EN 14808 (A4 ≥55% <75%)	64 EN 14808 (A4 ≥55% <75%)	60 EN 14808 (A4 ≥55% <75%)	59 EN 14808 (A4 ≥55% <75%)	-
Vertical deformation, mm	3,5 EN 14809 (A4 ≥2,3 <5)	3,1 EN 14809 (A4 ≥2,3 <5)	2,8 EN 14809 (A4 ≥2,3 <5)	3,8 EN 14809 (A4 ≥2,3 <5)	-
Friction, nominal unit	94 EN 13036-4 (80-110)	94 EN 13036-4 (80-110)	97 EN 13036-4 (80-110)	93 EN 13036-4 (80-110)	89 EN 13036-4 (80-110)
Ball bounce, %	91 EN 12235 (≥90%)	93 EN 12235 (≥90%)	94 EN 12235 (≥90%)	99 EN 12235 (≥90%)	-
Rolling load, mm	0,21 EN 1569 (≤0,5mm, min. 1500N)	0,21 EN 1569 (≤0,5mm, min. 1500N)	0,15 EN 1569 (≤0,5mm, min. 1500N)	0,28 EN 1569 (≤0,5mm, min. 1500N)	0,3 EN 1569 (≤0,5mm, min. 1500N)

- | Acoustic Wall Panels
- | Decorative Wall Panels





ACOUSTIC WALL PANELS

SHEEN :

☾ Matte

CONSTRUCTION :


Veneered on MDF base T&G

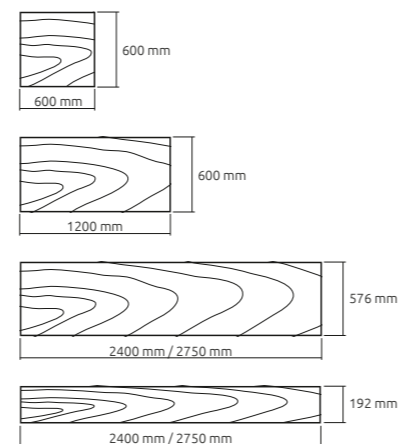


17.1 | 30/2/Ø10 | 30/2/Ø8




17.2 | 29/3/Ø10 | 29/3/Ø8




17.2 | Ø8



17.1 | 14/2/Ø10 | 14/2/Ø8



17.2 | 13/3/Ø10 | 13/3/Ø8



17.2 | Ø6




COSWICK ACOUSTIC 30/2



COSWICK ACOUSTIC 14/2



COSWICK ACOUSTIC 16/16

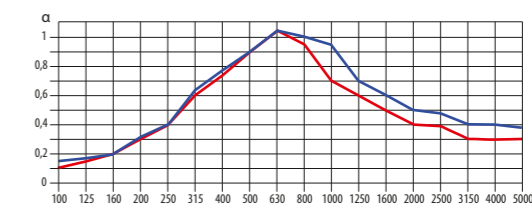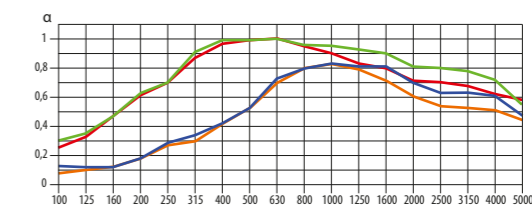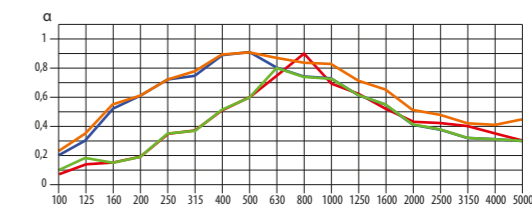




DECORATIVE WALL PANELS

SHEEN :


Matte

CONSTRUCTION :


Veneered on MDF base T&G




18.1 | VANILLA | OAK




18.2 | NATURAL | OAK




18.3 | CHESTNUT | OAK



18.4 | PASTEL | OAK



18.5 | CHAMBORD | OAK




18.6 | STONEY CREEK | OAK




18.7 | MOONLIGHT | ASH




18.8 | PEARL GREY | ASH




18.9 | TIGER EYE | ASH



18.10 | MOCCA | ASH



18.11 | NATURAL | A. WALNUT



18.12 | CLASSIC | A. WALNUT

- | Technologies
- | Finishing Systems
- | Color Palette
- | Grades
- | Technical Information
- | Floor Care Products
- | Moldings

3-layer T&G Engineered Flooring



THICKNESS, mm	15	19,05	19,05	21	19,05
TOP LAMELLA THICKNESS, mm	4	4	4	6	4
WIDTH, mm	127	127	190	190	300
LENGTH, mm	600...2100	600...2100	600...2100	600...2100	2950
MICROBEVEL, mm	0,5	0,5	0,5	0,5	0,5
AVERAGE LENGTH, m	1,0	0,99	1,22	1,12	2,95
FOOTAGE PER BOX, m ²	2,0	2,0	1,86	1,49	1,77


FEATURES:

- 3 layer construction with cross-laid interconnected middle core flooring is much less shrinks and expands at humidity variation and has wider range of applications in compare to solid flooring;
- birch is used for middle core and base lamella. Base lamella has increased thickness of 3 mm. This helps due to better symmetry to enhance internal balance of hardwood planks and reduce twisting or warping;
- cork compensators are added every 15 cm to balance internal stress in case of moisture effect and as a result helps flooring to withstand to humidity fluctuations;
- top wear layer is 4 mm and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood lamellas have no internal checks that could cause face splits later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance;
- high-adhesion hot-melted polyurethane glues are used to bond lamellas and middle core together. Extra strong bonding ensures that no delamination

occurs even under extreme moisture conditions or flooding. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly.

INSTALLATION:

Three-layer engineered tongue-groove flooring can be installed below, on or above ground. Can be installed on heated floors. The flooring can be glued down over concrete, plywood or wooden subfloor or nail down over wooden subfloor.



3-layer Single Strip Flooring CosLoc 5G



THICKNESS, mm	15	15
TOP LAMELLA THICKNESS, mm	4	4
WIDTH, mm	127	190
LENGTH, mm	600...2100	2100
MICROBEVEL, mm	0,5	0,5
AVERAGE LENGTH, m	0,99	2,1
FOOTAGE PER BOX, m ²	2,0	2,4


FEATURES:

- 3 layer construction with cross-laid interconnected middle core flooring is much less shrinks and expands at humidity variation and has wider range of applications in compare to solid flooring;
- birch is used for middle core and base lamella. Base lamella has increased thickness of 3 mm. This helps due to better symmetry to enhance internal balance of hardwood planks and reduce twisting or warping;
- cork compensators are added every 15 cm to balance internal stress in case of moisture effect and as a result helps flooring to withstand to humidity fluctuations;
- top wear layer is 4 mm and can be sanded up to 4 times. Coswick uses only sawn lamellas for top layer. Sawn hardwood lamellas have no internal checks that could cause face splits later on. Sawn hardwood lamellas are 100% solid wood and preserve the rich grain texture appearance;
- high-adhesion hot-melted polyurethane glues are used to bond lamellas and middle core together. Extra strong bonding ensures that no delamination occurs even under extreme moisture conditions or flooding. Coswick polyurethane adhesives are 100% formaldehyde free and are environmentally friendly;

- using birch for middle core with no gaps in between cross-laid bars significantly improve click performance and eliminate squeaking in floors;
- Valinge 5G click system make installation fast and easy.

INSTALLATION:

Three-layer single strip flooring can be installed below, on or above ground. It can be used for heated floors. Three-layer single strip CosLoc flooring can be installed by floating way on underlayment or by glueing down over concrete, plywood or wooden subfloor. Strips are locked from four sides by CosLoc. If necessary, the flooring can be installed in another room.



Solid Hardwood Flooring



THICKNESS, mm	19,05	19,05
WIDTH, mm	82,55	82,55
LENGTH, mm	320	412,75
MICROBEVEL, mm	0,5	0,5
AVERAGE LENGTH, m	320	412,75
FOOTAGE PER BOX, m ²	1,16	1,5


FEATURES:

- environmentally clean product, contains zero artificial components in its core;
- the wear layer is 7 mm thick, which allows to sand the surface up to 5-6 times;
- beautifully expresses the versatility and richness of natural wood texture;
- ensures excellent heat- and sound insulation;
- strengthens structural soundness of flooring surface.

INSTALLATION:

Solid hardwood flooring can be installed on or above ground level, by glue down or staple down to wooden subfloor. For glue down installation of long and wide planks, it is necessary to use staples or nails for pulling and securing planks to the subfloor and one to another.

Manufactured of solid hardwood, flooring planks are sensitive to humidity and as a result seasonal fluctuations in plank size are possible. After installation during dry winters small gaps may appear between the planks, but will close down during humid summer. In order to prevent the seasonal gaps, it is recommended to maintain relative indoor humidity levels at 45-55% throughout the year.



Coswick Lacquer



Coswick Silk Oil



Coswick Wax



CHARACTERISTICS	TYPE OF FLOORING FINISH					
	CosNanoTech+	CosNanoTech+ matte	Silk Oil	Silk Oil ultra matte	Hardwax Oil	Hardwax Oil Combi
CLASS OF MATERIALS	UV-cured polyurethane acrylates	UV-cured polyurethane acrylates	UV-cured modified oil-acrylates	UV-cured modified oil-acrylates	Organic oils and waxes, oxidative	UV-cured modified oil-acrylates, Organic oils and waxes, oxidative
SURFACE TYPE	Closed pores	Closed pores	Semi-closed pores, wire brushed	Semi-closed pores, wire brushed	Open pores, wire brushed	Semi-closed pores, wire brushed
GLOSS LEVEL	Semigloss or matte	Matte	Silk matte	Ultra matte	Matte	Silk matte
WEAR-RESISTANCE	Very high	Very high	High	High	Medium	High
RESISTANCE TO CHEMICALS	Very high	Very high	Very high	High	High	Very high
CARE AND MAINTENANCE	Regular care	Regular care	Regular care, restorative care, finish renewal	Regular care, restorative care, finish renewal	Regular care, restorative care, finish renewal	Regular care, restorative care, finish renewal
REPAIRABILITY	Low	Low	Medium	High	High	High
RANGE OF USE	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial	Residential and commercial
FINISH WARRANTY	25 years for residential, 35 years for residential (for commercial finish)	25 years	-	-	-	-

Coswick Lacquer

FINISH TECHNOLOGY

CosNanoTech+ finishing technology provides exceptional protection for your hardwood floors. CosNanoTech+ finish is composed of 12 coats of top quality sealers and compounds with aluminium dioxide for extra durability. Crosslinked nano particles are used to increase finish elasticity and maintain high wear resistance. Coswick CosNanoTech+ finish has 25-year warranty.

FEATURES

Clarity. Finished surface is clear and transparent. All you see is wood in its natural beauty.

Smoothness. Finished surface is very smooth to touch.

Durability. Innovative CosNanoTech+ finish is 10 times more wear-resistant than traditional urethane finishes. Coswick CosNanoTech+ prefinished floors are covered by 25-year finish wear warranty.

ECOLOGY

Environmentally friendly. CosNanoTech+ prefinished hardwood floors have zero VOC emissions.

Antibacterial Shield. CosNanoTech+ finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

Coswick Silk Oil

FINISH TECHNOLOGY

Innovative Silk Oil protective finish consists of 4 coats of deep penetrating UV oil. Silk Oil finished flooring feels warm and smooth under your feet, it does not show dents and scratches as much as other finishes do. Silk Oil floor is very easy to maintain and restore.

FEATURES

Smoothness. Silk Oil finished floors feel warm and silky smooth under your feet. Walking barefoot on oiled floors feels incredible!

Universal use: Coswick Silk Oil floors are recommended for residential as well as commercial use. Water repellent properties of Silk Oil finish make oiled flooring the perfect choice for lakeside cottages, bars and restaurants.

Silk Oil is very forgiving. Because the finish is matte, small scratches and dents will not be visible on the floor surface, but will blend in with the natural wood grain texture.

ECOLOGY

Environmentally friendly. Silk Oil prefinished hardwood floors have zero VOC emissions.

Antibacterial Shield. Silk Oil finish serves as a shield that prevents bacteria and mildew from multiplying on floor surface.

CARE AND MAINTENANCE

Easy restoration and repair. If cared for correctly, oiled flooring will never need to be fully sanded and refinished. Depending on the amount of traffic, your Coswick Silk Oil floors will need to be re-oiled every few years. Coswick recovery oil can be applied directly over the old finish.

Easy care and maintenance. Sweeping or light vacuuming is all that is required for regular maintenance. Use Coswick Service Kit to clean and extend the life of your hardwood floor.

Coswick Wax

FINISH TECHNOLOGY

Hardwax Oil is an innovative hardwood flooring finish that consists of 3 layers of wax oil produced from natural components. Among the main ingredients of Hardwax Oil are organic oil, wax, and other natural components.

In Hardwax Oil finish, oil easily penetrates into wood pores, deeply saturating the wood, strengthening and protecting it from ill effects of moisture, dirt etc. Waxes create a hard protective film on the wood surface. Aside from moisture defense, they protect the floor surface from wearing.

Hardwood floors with Hardwax Oil finish easily absorb moisture and release it back into the air, thus helping to ensure a healthy atmosphere in the room.

FEATURES

Along with wire brushing technique, Hardwax Oil finish emphasizes natural texture and beauty of oak. Pores appear "open", visually preserving the depth of texture and relief.

ECOLOGY

Environmentally friendly. Silk Oil prefinished hardwood floors have zero VOC emissions.

CARE AND MAINTENANCE

Repairability. Hardwax Oil finish has a soft matte sheen, much like that of natural wood. Following finish renewal or re-waxing of the entire floor or worn-out areas, the sheen level temporarily increases, but returns to normal within a few days.

Select & Better (S&B)



Select and Better is the highest grade of hardwood. It has uniform grain texture, mild color variations are produced by differences in natural heartwood and sapwood. The face may contain unlimited sound sapwood and occasional small burls. Light brown streaks may not extend over the entire length of a piece. Occasional non-contrasting restored knots (10mm or smaller) are admitted on planks stained in dark colors as long as they do not stand out against the floor surface.

1 Natur (1N)




The face of a plank may contain unlimited sound sapwood. Color variation is prominent. Small burls, light brown streaks, restored knots up to 25 mm, properly filled open checks and worm holes, slight imperfections in face work (torn grain) and burns are admitted. When stained in a dark color, surface appears uniform in shade and texture, making knots etc barely discernible. 1 Natur grade is used to classify wide plank flooring 190 mm.

1 Common (1C)




The face of a plank may contain unlimited sound sapwood. Color variation is prominent. Small burls, light brown streaks, restored knots up to 25 mm, properly filled open checks and worm holes, slight imperfections in face work (torn grain) and burns are admitted. When stained in a dark color, surface appears uniform in shade and texture, making knots etc barely discernible. 1 Common is a tasteful floor where prominent variation is expected.

Character (Char)

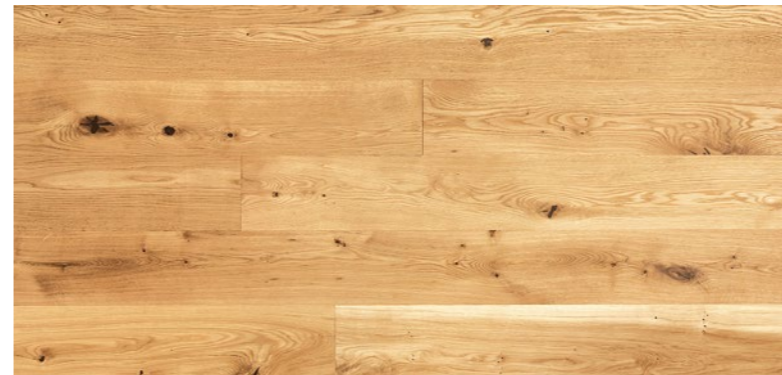

The face of a plank may contain prominent color variation, unlimited burls, brown streaks, open or filled knots of any size, and worm holes. Open splits and knots create effect of antique wood and emphasize authentic oak texture. Character grade is used to classify wide plank flooring 190mm; due to larger surface area, face of plank may contain a wide range and number of burls, streaks, knots, worm holes etc.

Tavern (Tav)

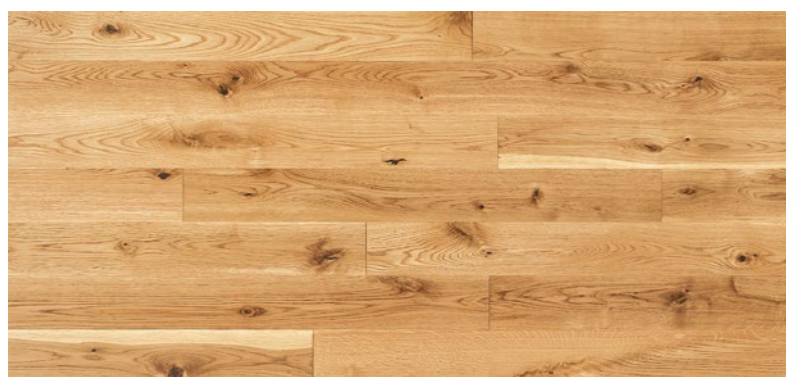

The face of a plank may contain prominent color variation, unlimited burls, brown streaks, tight knots and properly filled open knots, as well as worm holes. Imperfections in the face work (torn grain) and burns are admitted. Knots and other imperfections are intentionally highlighted in order to bring attention to the natural beauty and uniqueness of oak grain texture.

Technical Information

S&B Select & Better
 1C 1 Common
 Tav Tavern

Char Character
 1N 1 Natur
 Trad Traditional



CLASSIC COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring			3-layer single strip flooring CosLoc 5G	
			15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 190 x 600...2100 mm Footage per pack 1.86 m²	15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	15/4 x 190 x 600...2100 mm Footage per pack 2.3 m²
NATURAL	Lacquer	S&B	1167-1101	1154-1101		1153-1101	
ROSE	Lacquer	S&B	1167-1102	1154-1102		1153-1102	
CHESTNUT	Lacquer	S&B	1167-1104	1154-1104		1153-1104	
WALNUT	Lacquer	S&B	1167-1106	1154-1106		1153-1106	
CHARCOAL	Lacquer	S&B	1167-1107	1154-1107		1153-1107	
VANILLA	Lacquer	S&B	1167-1108	1154-1108		1153-1108	
MOONLIGHT	Lacquer	S&B	1267-1136	1254-1136		1253-1136	
MOONLIGHT	Silk Oil	S&B	1267-1236	1254-1236		1253-1236	
LAVENDER	Silk Oil	S&B	1267-1580	1254-1580		1253-1580	
CARAMEL	Silk Oil	S&B	1267-1260	1254-1260		1253-1260	
NATURAL	Lacquer	S&B	1367-1101	1354-1101	1363-1101	1353-1101	1361-1101
NATURAL	Silk Oil	S&B	1367-1201	1354-1201	1363-1201	1353-1201	1361-1201
NATURAL	Lacquer	Trad	1367-3101	1354-3101	1363-3101	1353-3101	1361-3101
NATURAL	Silk Oil	Trad	1367-3201	1354-3201	1363-3201	1353-3201	1361-3201
CLASSIC	Lacquer	1N	1367-3161	1354-3161	1363-3161	1353-3161	1361-3161
CLASSIC	Silk Oil	1N	1367-3261	1354-3261	1363-3261	1353-3261	1361-3261

BRUSHED & OILED COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring		3-layer single strip flooring CosLoc 5G
			15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²
NATURAL	Silk Oil	S&B	1167-1201	1154-1201	1153-1201
CHESTNUT	Silk Oil	S&B	1167-1204	1154-1204	1153-1204
CINNAMON	Silk Oil ultra matte	S&B	1167-1565	1154-1565	1153-1565
VANILLA	Silk Oil ultra matte	S&B	1167-1508	1154-1508	1153-1508
WHITE FROST	Silk Oil	S&B	1167-1258	1154-1258	1153-1258
CHABAUD	Silk Oil	S&B	1167-1259	1154-1259	1153-1259
GREY CLOUD	Silk Oil ultra matte	Tav	1267-4584	1254-4584	1253-4584
CANADIAN CEDAR	Silk Oil ultra matte	1C	1267-3562	1254-3562	1253-3562
FRENCH RIVIERA	Silk Oil	1C	1267-3257	1254-3257	1253-3257
CLOUDY	Silk Oil	1C	1267-3235	1254-3235	1253-3235
MOCCA	Silk Oil	1C	1267-3243	1254-3243	1253-3243
NORMAN BREEZE	Silk Oil	Tav	1267-4232	1254-4232	1253-4232

COUNTRY COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring			3-layer single strip flooring CosLoc 5G	
			15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 190 x 600...2100 mm Footage per pack 1.86 m²	15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	15/4 x 190 x 2100 mm Footage per pack 2.4 m²
NATURAL	Silk Oil	1C/1N*	1167-3201	1154-3201	1163-3201*	1153-3201	1133-3201*
CHESTNUT	Silk Oil	1C/1N*	1167-3204	1154-3204	1163-3204*	1153-3204	1133-3204*
BROWN SUGAR	Silk Oil ultra matte	1C/1N*	1167-3529	1154-3529	1163-3529*	1153-3529	1133-3529*
MILK CHOCOLATE	Silk Oil	1C/1N*	1167-3217	1154-3217	1163-3217*	1153-3217	1133-3217*
CHAMBORD	Silk Oil	1C/1N*	1167-3215	1154-3215	1163-3215*	1153-3215	1133-3215*
ALPINE	Silk Oil ultra matte	Tav/Char*	1167-4578	1154-4578	1163-7578*	1153-4578	1133-7578*
SNOWDROP	Silk Oil ultra matte	Tav/Char*	1167-4593	1154-4593	1163-7593*	1153-4593	1133-7593*
FRENCH ESTATE	Silk Oil	Tav/Char*	1167-4212	1154-4212	1163-7212*	1153-4212	1133-7212*
DARK CHOCOLATE	Silk Oil	Tav/Char*	1167-4216	1154-4216	1163-7216*	1153-4216	1133-7216*
ROCKY REEF	Silk Oil	Tav/Char*	1167-4230	1154-4230	1163-7230*	1153-4230	1133-7230*
AMBER	Silk Oil	Tav/Char*	1167-4213	1154-4213	1163-7213*	1153-4213	1133-7213*
GREY ASH	Silk Oil ultra matte	1N			1163-3503		1133-3503

SIGNATURE COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring		3-layer single strip flooring CosLoc 5G
			15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	15/4 x 127 x 600...2100 mm Footage per pack 1.79 m²
SANDY	Lacquer matte	S&B		1154-1323	1153-1323
STONEY CREEK	Lacquer matte	S&B		1154-1325	1153-1325
CHAMBORD	Lacquer matte	S&B		1154-1315	1153-1315
ALBATROSS	Lacquer matte	S&B		1154-1322	1153-1322
NORD SEA	Lacquer matte	S&B		1154-1324	1153-1324
CHARCOAL	Lacquer matte	S&B		1154-1307	1153-1307
MOONLIGHT	Lacquer matte	S&B	1267-1336	1254-1336	1253-1336
SILVERY	Lacquer matte	S&B	1267-1337	1254-1337	1253-1337
PEARL GREY	Lacquer matte	S&B	1267-1345	1254-1345	1253-1345
TIGER EYE	Lacquer matte	S&B	1267-1344	1254-1344	1253-1344
ATLANTIC	Lacquer matte	S&B	1267-1339	1254-1339	1253-1339
CAPPUCCINO	Lacquer matte	S&B	1267-1338	1254-1338	1253-1338

HERITAGE COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring			3-layer single strip flooring CosLoc 5G	
			15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	19.05/4 x 190 x 600...2100 mm Footage per pack 1.86 m²	15/4 x 127 x 600...2100 mm Footage per pack 2.0 m²	15/4 x 190 x 2100 mm Footage per pack 2.4 m²
PASTEL	Silk Oil	1C / 1N*		1154-3247	1163-3247*	1153-3247	1133-3247*
ANTIQUÉ PATINA	Silk Oil	Tav/Char*	1167-4250	1154-4250	1163-7250*	1153-4250	1133-7250*
GREY CASHMERE	Silk Oil	Tav/Char*	1167-4251	1154-4251	1163-7251*	1153-4251	1133-7251*
FRENCH GOBELIN	Silk Oil	Tav/Char*	1167-4249	1154-4249	1163-7249*	1153-4249	1133-7249*
TERRA	Silk Oil	Tav/Char*	1167-4248	1154-4248	1163-7248*	1153-4248	1133-7248*
INDIGO	Silk Oil ultra matte	Tav/Char*	1167-4556	1154-4556	1163-7556*	1153-4556	1133-7556*
GRAPE SEED	Silk Oil ultra matte	Tav/Char*	1167-4540	1154-4540	1163-7540*	1153-4540	1133-7540*
VINTAGE BROWN	Silk Oil ultra matte	Tav/Char*	1167-4554	1154-4554	1163-7554*	1153-4554	1133-7554*
RAUCHTOPAZ	Silk Oil ultra matte	Tav/Char*	1167-4505	1154-4505	1163-7505*	1153-4505	1133-7505*
CRYSTAL WHITE	Silk Oil ultra matte	Tav/Char*	1167-4588	1154-4588	1163-7588*	1153-4588	1133-7588*
GREY VELVET	Silk Oil ultra matte	Tav/Char*	1167-4574	1154-4574	1163-7574*	1153-4574	1133-7574*
IVORY	Silk Oil ultra matte	Tav/Char*	1167-4586	1154-4586	1163-7586*	1153-4586	1133-7586*

ARTS & CRAFTS COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring		3-layer single strip flooring CosLoc 5G
			19.05/4 x 190 x 600...2100 mm Footage per pack 1.86 m²	15/4 x 190 x 2100 mm Footage per pack 2.4 m²	15/4 x 190 x 2100 mm Footage per pack 2.4 m²
VIENNA	Hardwax Oil / Silk Oil ultra matte	Char	1163-7919 / 1163-7519		1133-7919 / 1133-7519
GENEVA	Hardwax Oil / Silk Oil ultra matte	Char	1163-7920 / 1163-7520		1133-7920 / 1133-7520
OLD VENICE	Hardwax Oil / Silk Oil ultra matte	Char	1163-7921 / 1163-7521		1133-7921 / 1133-7521
MARSEILLE	Hardwax Oil / Silk Oil ultra matte	Char	1163-7928 / 1163-7528		1133-7928 / 1133-7528
LONDON	Hardwax Oil / Silk Oil ultra matte	Char	1163-7926 / 1163-7526		1133-7926 / 1133-7526
BATISTE	Hardwax Oil / Silk Oil ultra matte	Char	1163-7918 / 1163-7518		1133-7918 / 1133-7518
ALBION	Hardwax Oil / Silk Oil ultra matte	Char	1163-7971 / 1163-7571		1133-7971 / 1133-7571
STONEHENGE	Hardwax Oil / Silk Oil ultra matte	Char	1163-7972 / 1163-7572		1133-7972 / 1133-7572
HEATHER	Hardwax Oil / Silk Oil ultra matte	Char	1163-7973 / 1163-7573		1133-7973 / 1133-7573
MISTY FJORDS	Hardwax Oil / Silk Oil ultra matte	Char	1163-7963 / 1163-7563		1133-7963 / 1133-7563
BARCELONA	Hardwax Oil / Silk Oil ultra matte	Char	1163-7927 / 1163-7527		1133-7927 / 1133-7527
SCANDINAVIAN	Hardwax Oil / Silk Oil ultra matte	Char	1163-7975 / 1163-7575		1133-7975 / 1133-7575

WIDE PLANK FLOORING

COLOR	FINISH	GRADE	3-layer T&G engineered flooring	
			19.05/4 × 300 × 2950 mm Footage per pack 1.77 m ²	19.05/4 × 300 × 600...2950 mm Footage per pack 1.77 m ²
NATURAL	Silk Oil	Char	1165-7501	
NATURAL	Hardwax Oil	Char	1165-7901	
VANILLA	Silk Oil	Char	1165-7508	
SNOWDROP	Silk Oil	Char	1165-7593	
MILK CHOCOLATE	Silk Oil	Char	1165-7517	
BATISTE	Hardwax Oil	Char	1165-7918	
MARSEILLE	Hardwax Oil	Char	1165-7928	
OLD VENICE	Hardwax Oil	Char	1165-7921	
A.W. NATURAL	Resilient Lacquer	Char		1366-7601

CHEVRON COLLECTION

COLOR	FINISH	GRADE	Solid plank flooring	3-layer T&G engineered flooring			
			19.05 × 82.55 × 320 mm (45°) Footage per pack 1.16 m ²	15/4 × 107.95 × 530 mm (45°) Footage per pack 1.72 m ²	19.05/4 × 127 × 500 mm (45°) Footage per pack 1.016 m ²	19.05/4 × 127 × 548 mm (60°) Footage per pack 1.114 m ²	19.05/4 × 190 × 438.78 mm (60°) Footage per pack 1.667 m ²
NATURAL	Lacquer	S&B	1128-1101	1169-1101			
PASTEL	Silk Oil	S&B/1C*	1128-1247	1169-1247	1134-3247*	1123-3247*	1183-3247
WHITE FROST	Silk Oil	S&B			1134-1258	1123-1258	
ALPINE	Silk Oil ultra matte	Tav			1134-4578	1123-4578	
CHAMBORD	Silk Oil	1C	1128-3215	1169-3215			1183-3215
ROCKY REEF	Silk Oil	Tav	1128-4230	1169-4230			1183-4230
MILK CHOCOLATE	Silk Oil	1C	1128-3217	1169-3217	1134-3217	1123-3217	1183-3217
CHARCOAL	Silk Oil ultra matte	Tav	1128-4507	1169-4507			1183-4507
PEARL GREY	Lacquer	S&B		1269-1145			
MOONLIGHT	Lacquer	S&B		1269-1136			
FRENCH RIVIERA	Silk Oil	1C		1269-3257			
NORMAN BREEZE	Silk Oil	Tav		1269-4232			
NATURAL	Lacquer	S&B		1369-1101	1334-1101	1323-1101	1383-1101
NATURAL	Silk Oil	S&B		1369-1201	1334-1201	1323-1201	1383-1201
NATURAL	Lacquer	Trad		1369-3101	1334-3101	1323-3101	1383-3101
NATURAL	Silk Oil	Trad		1369-3201	1334-3201	1323-3201	1383-3201

CHEVRON CosLoc COLLECTION

COLOR	FINISH	GRADE	3-layer T&G engineered flooring	
			15/4 × 127 × 400 mm (60°) Footage per pack 1.016 m ²	15/4 × 127 × 548 mm (60°) Footage per pack 1.392 m ²
PASTEL	Silk Oil	1C	1127-3247	1126-3247
WHITE FROST	Silk Oil	S&B	1127-1258	1126-1258
ALPINE	Silk Oil ultra matte	Tav	1127-4578	1126-4578
MILK CHOCOLATE	Silk Oil	1C	1127-3217	1126-3217
NATURAL	Lacquer	S&B	1327-1101	1326-1101
NATURAL	Silk Oil	S&B	1327-1201	1326-1201
NATURAL	Lacquer	Trad	1327-3101	1326-3101
NATURAL	Silk Oil	Trad	1327-3201	1326-3201

HERRINGBONE COLLECTION

COLOR	FINISH	GRADE	Solid plank flooring	3-layer T&G engineered flooring	
			19.05 × 82.55 × 412.75 mm (90°) Footage per pack 1.5 m ²	15/4 × 107.95 × 647.7 mm (90°) Footage per pack 2.1 m ²	19.05/4 × 127 × 635 mm (90°) Footage per pack 1.29 m ²
VANILLA	Silk Oil ultra matte	S&B	1125-1508	1168-1508	1122-1508
CHESTNUT	Lacquer	S&B	1125-1104	1168-1104	
WHITE FROST	Lacquer	S&B	1125-1158	1168-1158	
WHITE FROST	Silk Oil	S&B	1125-1258	1168-1258	1122-1258
PASTEL	Silk Oil	S&B/1C*	1125-1247	1168-1247	1122-3247*
ALPINE	Silk Oil ultra matte	Tav			1122-4578
CHAMBORD	Silk Oil	1C	1125-3215	1168-3215	
GREY CASHMERE	Silk Oil	Tav	1125-4251	1168-4251	
ROCKY REEF	Silk Oil	Tav	1125-4230	1168-4230	
MILK CHOCOLATE	Silk Oil	1C			1122-3217
CHARCOAL	Silk Oil ultra matte	Tav	1125-4507	1168-4507	
PEARL GREY	Lacquer	S&B		1268-1145	
MOONLIGHT	Lacquer	S&B		1268-1136	
FRENCH RIVIERA	Silk Oil	1C		1268-3257	
NORMAN BREEZE	Silk Oil	Tav		1268-4232	
NATURAL	Lacquer	S&B		1368-1101	1322-1101
NATURAL	Silk Oil	S&B		1368-1201	1322-1201
NATURAL	Lacquer	Trad		1368-3101	1322-3101
NATURAL	Silk Oil	Trad		1368-3201	1322-3201

MOSAIC FLOORING

COLOR	FINISH	GRADE	2-layer T&G engineered flooring			
			Pattern: Versailles 19.05/8 × 635 × 635 mm Footage per pack 1.61 m ²	Pattern: Trianon 19.05/8 × 635 × 635 mm Footage per pack 1.61 m ²	Pattern: Langeais 19.05/8 × 635 × 635 mm Footage per pack 1.61 m ²	Pattern: Cheverny 19.05/8 × 635 × 635 mm Footage per pack 1.61 m ²
NATURAL	Hardwax Oil combi	S&B	1114-1701	1115-1701	1116-1701	1117-1701
OLD VENICE	Hardwax Oil combi	S&B	1114-1721	1115-1721	1116-1721	1117-1721
MARSEILLE	Hardwax Oil combi	S&B	1114-1728	1115-1728		
NATURAL	Hardwax Oil combi	S&B	1314-1701	1315-1701	1316-1701	1317-1701
NATURAL	Resilient Lacquer	Trad	1314-3601	1315-3601	1316-3601	1317-3601
CLASSIC	Hardwax Oil combi	1N	1314-3761	1315-3761	1316-3761	1317-3761
NATURAL	Hardwax Oil combi	S&B			1816-1701	1817-1701

PARQUETRY

COLOR	FINISH	GRADE	3-layer T&G engineered flooring, TILE	3-layer G&G engineered flooring, PYRAMID
			19.05/4x190x220 mm Footage per pack 1.257 m ²	19.05/4x190x440 mm Footage per pack 1.257 m ²
WHITE FROST	Silk Oil	S&B	1193-1258	1194-1258
PASTEL	Silk Oil	S&B	1193-1247	1194-1247
CHAMBORD	Silk Oil	Tav	1193-4215	1194-4215
MILK CHOCOLATE	Silk Oil	Tav	1193-4217	1194-4217
GREY CASHMERE	Silk Oil	Tav	1193-4251	1194-4251
NATURAL	Silk Oil	S&B	1193-1201	1194-1201
NATURAL	Silk Oil	Trad	1193-3201	1194-3201
















DECORATIVE WALL PANELS

	COLOR	SHEEN	Veneered on MDF base T&G	
			16 x 600 x 600 mm	16 x 600 x 1200 mm
OAK	NATURAL	Matte	5015-0512-0201	5015-0509-0201
	CHESTNUT	Matte	5015-0512-0204	5015-0509-0204
	STONEY CREEK	Matte	5015-0512-0225	5015-0509-0225
	VANILLA	Matte	5015-0512-0208	5015-0509-0208
	CHAMBORD	Matte	5015-0512-0215	5015-0509-0215
	PASTEL	Matte	5015-0512-0247	5015-0509-0247
	MOONLIGHT	Matte	5025-0512-0236	5025-0509-0236
ASH	PEARL GREY	Matte	5025-0512-0245	5025-0509-0245
	TIGER EYE	Matte	5025-0512-0244	5025-0509-0244
	MOCCA	Matte	5025-0512-0243	5025-0509-0243
A. WALNUT	NATURAL	Matte	5035-0512-0201	5035-0509-0201
	CLASSIC	Matte	5035-0512-0261	5035-0509-0261

ACOUSTIC WALL PANELS

	COLOR	SHEEN	DIMENSIONS, mm	Veneered on MDF base			
				30/2/Ø10	29/3/Ø10	14/2/Ø10	13/3/Ø10
OAK	NATURAL	Matte	16x192x2400	5014-0304-0202-01	5014-0304-0402-01	5014-0304-0602-01	5014-0304-0802-01
			16x576x2400	5014-0404-0202-01	5014-0404-0402-01	5014-0404-0602-01	5014-0404-0802-01
	CHESTNUT	Matte	16x192x2400	5014-0304-0202-04	5014-0304-0402-04	5014-0304-0602-04	5014-0304-0802-04
			16x576x2400	5014-0404-0202-04	5014-0404-0402-04	5014-0404-0602-04	5014-0404-0802-04
	STONEY CREEK	Matte	16x192x2400	5014-0304-0202-25	5014-0304-0402-25	5014-0304-0602-25	5014-0304-0802-25
			16x576x2400	5014-0404-0202-25	5014-0404-0402-25	5014-0404-0602-25	5014-0404-0802-25
	VANILLA	Matte	16x192x2400	5014-0304-0202-08	5014-0304-0402-08	5014-0304-0602-08	5014-0304-0802-08
			16x576x2400	5014-0404-0202-08	5014-0404-0402-08	5014-0404-0602-08	5014-0404-0802-08
	CHAMBORD	Matte	16x192x2400	5014-0304-0202-15	5014-0304-0402-15	5014-0304-0602-15	5014-0304-0802-15
			16x576x2400	5014-0404-0202-15	5014-0404-0402-15	5014-0404-0602-15	5014-0404-0802-15
	PASTEL	Matte	16x192x2400	5014-0304-0202-47	5014-0304-0402-47	5014-0304-0602-47	5014-0304-0802-47
			16x576x2400	5014-0404-0202-47	5014-0404-0402-47	5014-0404-0602-47	5014-0404-0802-47
A. WALNUT	NATURAL	Matte	16x192x2400	5034-0304-0202-01	5034-0304-0402-01	5034-0304-0602-01	5034-0304-0802-01
			16x576x2400	5034-0404-0202-01	5034-0404-0402-01	5034-0404-0602-01	5034-0404-0802-01
	CLASSIC	Matte	16x192x2400	5034-0304-0202-61	5034-0304-0402-61	5034-0304-0602-61	5034-0304-0802-61
16x576x2400	5034-0404-0202-61		5034-0404-0402-61	5034-0404-0602-61	5034-0404-0802-61		
	COLOR	SHEEN	DIMENSIONS, mm	Veneered on MDF base			
				Ø6	Ø8		
OAK	NATURAL	Matte	16x600x600	5014-0512-0902-01	5014-0512-1002-01		
			16x600x1200	5014-0509-0902-01	5014-0509-1002-01		
	CHESTNUT	Matte	16x600x600	5014-0512-0902-04	5014-0512-1002-04		
			16x600x1200	5014-0509-0902-04	5014-0509-1002-04		
	STONEY CREEK	Matte	16x600x600	5014-0512-0902-25	5014-0512-1002-25		
			16x600x1200	5014-0509-0902-25	5014-0509-1002-25		
	VANILLA	Matte	16x600x600	5014-0512-0902-08	5014-0512-1002-08		
			16x600x1200	5014-0509-0902-08	5014-0509-1002-08		
	CHAMBORD	Matte	16x600x600	5014-0512-0902-15	5014-0512-1002-15		
			16x600x1200	5014-0509-0902-15	5014-0509-1002-15		
	PASTEL	Matte	16x600x600	5014-0512-0902-47	5014-0512-1002-47		
			16x600x1200	5014-0509-0902-47	5014-0509-1002-47		
A. WALNUT	NATURAL	Matte	16x600x600	5034-0512-0902-01	5034-0512-1002-01		
			16x600x1200	5034-0509-0902-01	5034-0509-1002-01		
	CLASSIC	Matte	16x600x600	5034-0512-0902-61	5034-0512-1002-61		
16x600x1200	5034-0509-0902-61		5034-0509-1002-61				

AVAILABLE IN ALL COSWICK COLORS AND FINISHES

			SOLID PLANK FLOORING T&G	3-LAYER ENGINEERED T&G FLOORING	3-LAYER SINGLE STRIP COSLOC 5G
			19 mm	19 mm	15 mm
	OAK	Solid			
	OAK	Solid			
	ASH	Solid			
	AMERICAN WALNUT	Solid			
	OAK	Solid			
	ASH	Solid			
	AMERICAN WALNUT	Solid			
	OAK	Veneer			
	ASH	Veneer			
	AMERICAN WALNUT	Veneer			
	OAK	Veneer			
	ASH	Veneer			
	AMERICAN WALNUT	Veneer			
	BIRCH	Solid			

COSWICK COATINGS AND ADHESIVES

COSWICK – OVER 25 YEARS OF DEDICATION TO HARDWOOD FLOORING

Since 1995 Coswick has been creating premium quality hardwood floors of superb and long-lasting performance. The company gained wide manufacturing experience by operating a fully integrated production cycle from logs to readymade prefinished hardwood flooring and became recognized all over the world. We are glad to share our experience with experts and hardwood floors owners as a system of tested products for every stage of hardwood flooring use.

Coswick well-balanced formula and unique quality control system ensure highest quality of primers, adhesives, lacquers, cleaners, renovation and care products suitable for all types of hardwood floors and protective-decorative finishes.

Coswick is dedicated to production of well balanced, high performance, eco-friendly and easy to use products. We are working to make your hardwood flooring everlasting and bringing you joy and happiness.



COSWICK SERVICE KIT

is designed to clean solid and engineered wood floors that have a lacquer or oil finish. The kit includes a microfiber mop cloth and ready-to-use Coswick Hardwood Cleaner.

Microfiber mop cloth:

- Machine washable;
- Very effective against dust;
- Highly absorbent and long lasting.

Ready-to-use Hardwood Cleaner:

- Perfect for regular cleaning of finished wooden floors;
- Excellent grease and dirt removing properties;
- Non-abrasive, leaves no residue;
- Delicate scent.

CLEANER FOR LACQUERED HARDWOOD FLOORS

Cleaner is meant for regular care and maintenance of lacquered wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. 0.5 litres per bottle.

CLEANER CONCENTRATE FOR LACQUERED HARDWOOD FLOORS

Cleaner Concentrate is meant for regular care and maintenance of lacquered or UV-oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10 ml of concentrate per 0.5 l of water).

CLEANER FOR OILED AND HARDWAX OILED HARDWOOD FLOORS

Cleaner is meant for regular care and maintenance of oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. 0.5 litres per bottle.

CLEANER CONCENTRATE FOR OILED AND HARDWAX OILED HARDWOOD FLOORS

Cleaner Concentrate is meant for regular care and maintenance of oiled and Hardwax oiled wood flooring. Neutral pH ensures minimal risk of color changes, creates a protective film, extends protective properties of flooring finish. Dilute agent at ratio of 1:50 (10 ml of concentrate per 0.5 l of water).

RENEWER OIL FOR OILED AND HARDWAX-OILED HARDWOOD FLOORS

Product is meant for surface renewal of hardwood floors with UV oil and Hardwax-oil finishes. Product creates a firm, elastic protective surface film. 0.75 litres per bottle.

PROTECTIVE WAX FOR HARDWOOD FLOORS

Product is intended for recovering of hardwood floors with natural oil, Hardwax or Silk Oil finishes. Product creates a thin, elastic, protective and water-repellent surface film. 0.75 litre per bottle.

TINTED OIL FOR RESTORATION OF OILED AND HARDWAX OILED HARDWOOD FLOORS

Product is meant for recovery and repair of hardwood floors with natural oil and Hardwax finishes. Product creates an elastic protective film on floor surface. 0.75 litre per bottle.

COSWICK WOOD STAIN

Coswick stains are designed for giving wood surfaces a desired color. 0.75 litre per bottle.

HEAVY DUTY CLEANER FOR HARDWOOD FLOORS

Coswick Heavy Duty Cleaner is meant for lacquered and oiled prefinished wood flooring. Recommended for removal of glue spots just after installation and for removal of any deep stain spots and marks during regular floor maintenance. 1.0 litre per bottle.

REPAIR KIT PROFI

COSWICK WAX FILLER

Ready-to-use wax for quick repairs of small damages in floors with all types of finish. Wax filler is available in all Coswick colors.





COSWICK LTD.

2B Kolasa Str
223 034 Zaslavl
Republic of Belarus
Tel: +375-17-543-2012
Fax: +375-17-543-2020
E-mail: sales@coswick.com

www.coswick.com

