

PARKKY[®]



ENG | 2020

A PRODUCT OF DECOSPAN.

It's good to live on wood





Contents

4	It's good to live on wood
8	Why Parky
14	Collection
24	Inspiration
46	Overview
50	Installation and maintenance

**It's good to
live on wood**



A PRODUCT OF _DECOSPAN.

Wood is something to love. It brings nature into your home. Due to the uniqueness and characteristics of the trees, not one board is the same. The beauty of imperfections caused by the veins and structure brings life-hood to your floor. Easy to install like a laminate floor, care and maintenance free as vinyl but with the warmth and cosiness of real hard wood.



As sustainable grown wood is getting scarce, we are extremely mindful using it. By using veneers, thinly sliced layers of real wood, we maximize the use of the harvested wood species grown over decades. Reinforcing the thin layers of wood with a 100% wood based High Density Fibre board we create all natural floors which are stronger and way more durable than your classic wooden floor. This combination allows you to live at the fullest on your beautiful wood floors.

Our goal is to make wood floors that inspire. For over 40 years we have innovated our production processes to achieve a rock solid finish; still keeping in mind the natural look and feel of the precious wood species like oak, walnut and some exotics. Everything is made in Belgium, at the heart of Europe, with the help and knowledge of an amazing team. 700 employees around the globe are fully committed to create the floor for your home or project. We are going the extra mile to create fabulous looks, sharp prices with woods full off character. This in order for you to achieve the interior look and feel of your dreams.





Our new Titanium finish has eight robust layers of lacquer. This results in an almost scratch-resistant natural floor designed for intensive use.



6 - 7

Why Parky



02

A sustainable choice

Wood is precious. We use it sparingly: we only use a thin layer of wood for the top finish. We source our trees from **sustainable managed forests** and every board is **100% recyclable**, participating as such in the circular economy. We source energy from solar and wind production. The sawdust and wood waste from our production facility is used to heat the floor space. The future is a CO₂ neutral world.

Real wood

Feel real wood. Each Parky floor is finished with a **top layer of authentic wood species**. Just like a solid wood floor, no two boards are the same. Oak, teak or other species give that beautiful natural look you are aiming for. The warmth of wood can never be found in fake.

01



03

Waterproof surface

The Parky board has a **waterproof surface**. The combination with the **Aqua Sealing Complete system**, which protects the bevels, gives you a 12 hour waterproof floor. This makes your floor bullet proof for daily spills and drops.



04

High-strength and scratch resistant

Scratch resistant

Parky floors are ultra-high-strength. Our new **Titanium finish** has eight robust layers of lacquer. This makes your floor almost scratch-resistant and ready for intensive use.

High-strength

Our Titanium finished wood in combination with a core out of **high density fibre board (HDF)**, makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor. Use Parky with peace of mind in the toughest places of your house such as your kitchen or high traffic areas in commercial use such as hotel lobby's, offices, retail stores...



The secret lies in the well-thought-out structure



Titanium: the invisible 8-layer varnish

We can call it **Titanium!** Extremely strong due to eight layers of especially developed "bullet" proof lacquer. Your floor will be **resistant to daily wear and tear as well as scratches**, the **pores are moist and dirt resistant**. A **brushed finish** is available allowing you to feel the natural grains and patterns of the wood. This extremely strong and matt lacquer is nearly invisible.



Wood backing for dimensional **stability**.

With Deluxe+ and Royal+ a 2 mm layer of cork provides a **softer footfall sound**.

Real Wood

On the HDF board we press a **wood wear layer** according to the DSI system (Double sided impregnation). During this process the adhesive gets pressed into the wood. While lacquering the top layer, the wood absorbs the varnish and makes a fusion with the adhesive. The result is a Titanium wooden top layer.

Strong high-density board

The thinner the wooden top layer, the more resistant the floor is to impact. The HDF just below the wear layer is even **stronger than natural wood**. This allows us to make sure the floor is more resistant to heavy objects or stiletto heels.



Wear layer 0,6 mm oak



Wear layer 2 mm oak



Solid oak



Completely hygienic

Parky's V grooves are not a hotbed for dust and dirt. Each groove is coloured and sealed with the **Aqua Sealing Complete system**. This **protects your wood against moisture**. Each board also has an **"Ultra-fresh" antibacterial protection** to withhold bacteria from settling into the groove. A hygienic floor is guaranteed.



Easy to install


Parky, it's as **easy to install as laminate and LVT**. Count on the handy **Uniclic®** and **Unifit X®** system for a problem free result. The warmth and feel good of wood is just a click away.



Discover even more advantages

Perfect match with your radiant heating

Different kinds of radiant heating systems can be used with Parky. All technical details can be found on our website.



Floor for healthier indoor air quality.

The Parky floor is only finished with water based stains, adhesives without volatile organic compounds and solvent free paints. It is scientifically proven: indoor **air quality improves** with a Parky floor. All floors have a **A+ quality label**.





Experience your best moments on a real wooden floor. Imitations such as vinyl or laminate can never match the warmth and uniqueness of real wood. You don't just see it, you feel it...



Endless variations with pure nature

- **Your species**
Wide range of oaks, walnuts and exotic types of wood.
- **Your patterns**
From straight boards to a herringbone pattern.
- **Your sizes**
Boards in different lengths and widths, with or without a 2 mm cork underlayer.

Pick your colour

Oaks



European Oak



Essence Oak



Ivory Oak



Crystal Oak



Silk Oak



Milk Oak



Sky Oak



Desert Oak

You prefer antique oak boards or wood with a distinct character? From rich chocolate brown to milky white, we'll be happy to help you choose the right colour.



Dune Oak



Umber Oak



Valley Oak




Antique Oak



History Oak



Mountain Oak

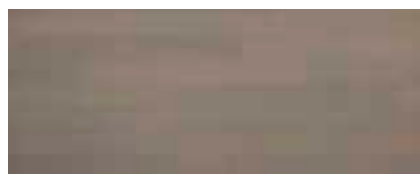

Manhattan Oak



Chocolate Oak

Walnuts



Frozen Walnut



Smoked Walnut



Stardust Walnut

Character Woods



Cotton Triba



Bamboo Steamed



Teak



Rosewood Santos



Jatoba

The uniqueness of oak

There are plenty of oak options. Pure oaks give you the emphasis of a pure and clean look; the rustic variant has a more pronounced character thanks to the knots. It's up to you to choose the look and feel you want whether you go for a 0.6 or 2 mm wooden top layer.

PREMIUM

We only use the purest 0.6 mm veneer wood for our Premium boards. Exceptionally pure quality from the very best of nature.

SELECT

This 2 mm wear layer is a beautiful, natural blend of structures and slightly more pronounced wood grains. The perfect natural look.



Pure Oak



More information regarding the possible combinations of colour, style, size or wear layer can be found on page 46

RUSTIC LIGHT

This rustic wooden floor seeks the balance between smaller and larger knots for a more pronounced pattern.

RUSTIC NATURE

Bring nature into your home with this intensely rustic floor: the knots and the natural character are strikingly present.



Rustic Oak




The pattern that suits you

Parky offers you endless combinations. Whatever pattern you choose, it remains timeless, from ultra-sleek villas to stately mansions and everything in between. Different lengths and widths offer a wide range of choices: from a classically laid board floor to a herringbone pattern. Even an elegant double herringbone pattern is possible.




Deluxe+ 06 Desert Oak Premium

Herringbone



Double herringbone



Available as pattern floor




European Oak



Ivory Oak



Desert Oak



Smoked Walnut



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com



Which colour and style can be combined can be found in the overview on page 46









Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com

The **size of the room** determines the size of your boards. For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger.

We'll give you **eight possible sizes** to work with. Don't worry if you find it difficult to choose, feel free to ask your distributor for advice.


Two click systems

All our floors are equipped with the handy **Uniclic®** or **Unifit X®** system, which makes installation as easy as it can be. With the Unifit X® fold-down option, you can even save 30% on installation time. All the advantages of a click laminate, but with the difference that you feel the warmth of real wood under your feet.

Board floors					
Wear layer 0.6 mm	Pro 06		1203 x 190 x 7.2 mm (47-3/8 x 7-1/2 x 9/32 inch)	UNICLIC®	
	Lounge 06		1203 x 124 x 8.3 mm (47-3/8 x 4-7/8 x 5/16 inch)		
	Master 06		1506 x 166 x 10 mm (59-5/16 x 6-1/2 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
	Deluxe+ 06		1810 x 166 x 12 mm (71-1/4 x 6-1/2 x 1/2 inch)		incl. 2 mm cork
	Summit 06		2050 x 233 x 10 mm (80-3/4 x 9-1/8 x 3/8 inch)		
Wear layer 2 mm	Classic 20		1185 x 148 x 10 mm (46-5/8 x 6 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
	Royal+ 20		1935 x 195 x 12 mm (76-1/8 x 7-5/8 inch x 1/2 inch)		incl. 2 mm cork
Pattern floor					
Wear layer 0.6 mm	Swing 06		593 x 121 x 10 mm (23-3/8 x 4-3/4 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
		 	<p>Herringbone</p> <p>Double herringbone</p>		

Floors made to live on



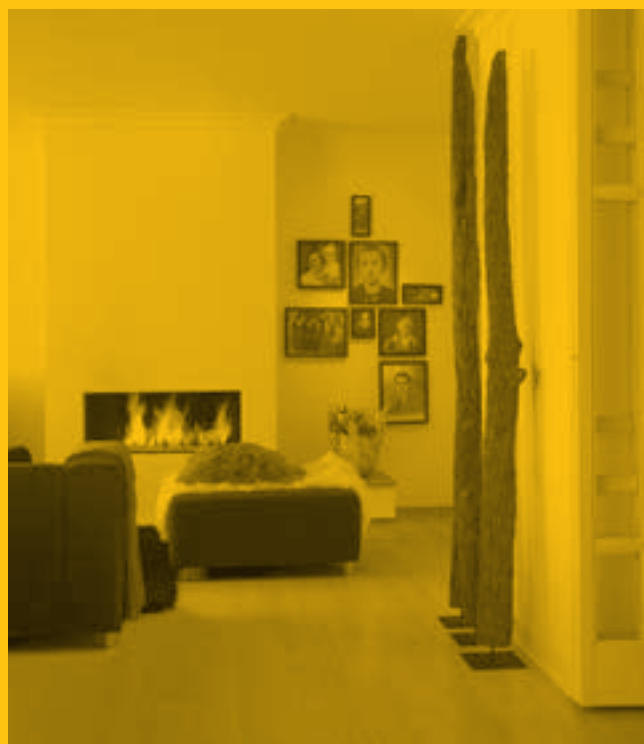

Each wood specie has its own character that can match your personality or taste. You can choose out of more than 20 colours, a range of patterns and sizes until you find the wooden floor that fits perfectly into your interior. Sleek and subtle, rustic for a pronounced touch or an exotic wood – you decide.







Classic 20 **Essence Oak Rustic Light**

Long, wide boards are ideal for larger spaces



Deluxe+ 06 **Chocolate Oak Premium**





Lounge 06 Cotton Tribo



The finish that gives your wooden floor a touch of perfection

We finish each board with a **Titanium finish**. Eight layers of high-strength lacquer that makes your wood almost "bullet" proof. This makes the surface **waterproof, protects pores in the wood** and makes it **easy to maintain**.

Our **brushed** finish accentuates the natural structure of the wood and gives the grain a beautiful appearance. On top, these brushed floors have a matt finish, giving them a very natural look. Exotic types of wood, on the other hand, are more attractive with a flat, glossy finish and are given a **sealed** finish.



Summit 06 Stardust Walnut







Can also be installed in
double herringbone



Classic 20 **Ivory Oak Select**



Pro 06 **Ivory Oak Rustic Light**



Pro 06 Antique Oak Premium



An aged floor with open knots provides extra structure and character






Summit 06 Dune Oak Premium



Commercially rated floors

Parky floors are made to live up to their full potential. This also makes them suitable for places where there is a lot of traffic, such as an office or retail. Lots of traffic isn't a problem: thanks to a high-quality finish in class 33, our floors are made for intensive use.





**Live life to the fullest
and enjoy every piece
of floor. The colour,
the structure, the
warmth of real wood.**








Matching skirtings
available for the full
range


Lounge 06 **Rosewood Santos**



Lounge 06 **Jatoba**



Lounge 06 **Bamboo Steamed**



Lounge 06 **Teak**

Summit 06 **Sky Oak Premium**










Oaks

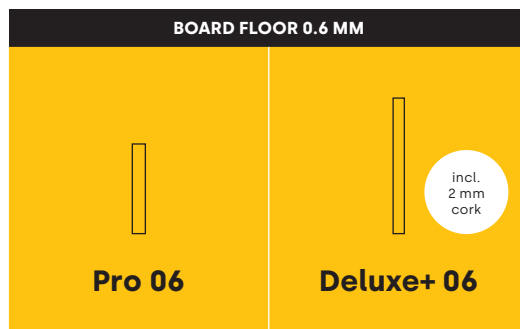

PARKY[®]
















BOARD FLOOR 0.6 MM



		Usage classification*	
			
Board	Dimensions	1203 × 190 mm 47-3/8 × 7-1/2 inch	1810 × 166 mm 71-1/4 × 6-1/2 inch
	Thickness	7.2 mm 9/32 inch	12 mm 1/2 inch
	Wear layer	0.6 mm	0.6 mm
	Click system		
Box	Boards	11	7
	Surface area	2.514 m ² 27.06 sq.ft	2.103 m ² 22.64 sq.ft
	Weight	16,30 kg	17.70 kg
Finish	Bevel	Maxi +/- 1,5 mm - Mini +/- 0,5 mm 4	2 2
	Gloss	Super matt (3%)	Super matt (3%)
	Structure	Brushed	Brushed
			<hr/>

European Oak	Premium	PRB101	DEXB+101
Ivory Oak	Premium	PRB102	DEXB+102
	Select		
	Rustic Light	PRB110	DEXB+110
	Rustic Nature		
Milk Oak	Premium	PRB103	DEXB+103
	Rustic Light	PRB137	DEXB+137
Desert Oak	Premium	PRB104	DEXB+104
	Select		
	Rustic Light	PRB116	DEXB+116
	Rustic Nature		
Umber Oak	Premium	PRB134	DEXB+134
	Rustic Light	PRB136	DEXB+136
Antique Oak	Premium	PRB106	DEXB+106
Manhattan Oak	Premium	PRB113	DEXB+113
Chocolate Oak	Premium	PRB108	DEXB+108
Crystal Oak	Premium	PRB170	DEXB+170
History Oak**	Rustic Nature		DEXB+173
Essence Oak	Premium		
	Select		
	Rustic Light		
	Rustic Nature		
Silk Oak	Premium		
	Select		
	Rustic Light		
	Rustic Nature		
Dune Oak	Premium		
Sky Oak	Premium		
Valley Oak	Premium		
	Rustic Light		
Mountain Oak	Premium		
	Rustic Light		

* Usage classification 31: residential + low commercial. Usage classification 33: residential + high commercial.
** Only domestic usage (EN685 class 23)

BOARD FLOOR 0.6 MM		BOARD FLOOR 2 MM		PATTERN FLOOR 0.6 MM
NEW 2020 	NEW 2020 		 incl. 2 mm cork	
Master 06	Summit 06	Classic 20	Royal+ 20	Swing 06
				
1506 × 166 mm 59-5/16 × 6-1/2 inch	2050 × 233 mm 80-3/4 × 9-1/8 inch	1185 × 148 mm 46-5/8 × 6 inch	1935 × 195 mm 76-1/8 × 7-5/8 inch	593 × 121 mm 23-3/8 × 4-3/4 inch
10 mm 3/8 inch	10 mm 3/8 inch	10 mm 3/8 inch	12 mm 1/2 inch	10 mm 3/8 inch
0.6 mm	0.6 mm	2 mm	2 mm	0,6 mm
				
8	5	9	6	11
2.000 m ² 21.53 sq.ft	2.388 m ² 25.7 sq.ft	1.578 m ² 17 sq.ft	2.264 m ² 24.37 sq.ft	0.789 m ² 8.49 sq.ft
17.3 kg	19.20 kg	13.50 kg	18.80 kg	6.9 kg
-	2	-	-	-
4	2	4	4	4
Super matt (3%)	Super matt (3%)	Matt (10%)	Matt (10%)	Super matt (3%)
Brushed	Brushed	Brushed	Brushed	Brushed
				SWXB101
				SWXB102
		CX20S102		
		CX20RL102	RX+20RL102	
		CX20RN102		
				SWXB104
		CX20S104		
		CX20RL104	RX+20RL104	
		CX20RN104		
MAXB188	SUXB188	CX20S188		
		CX20RL188	RX+20RL188	
		CX20RN188		
MAXB193	SUXB193	CX20S193		
		CX20RL193	RX+20RL193	
		CX20RN193		
MAXB197	SUXB197			
MAXB196	SUXB196			
MAXB194				
	SUXB198			
MAXB195				
	SUXB199			

Walnuts & Character Woods

BOARD FLOOR 0.6 MM



Pro 06

Usage classification*



Board	Dimensions	1203 x 190 mm 47-3/8 x 7-1/2 inch
	Thickness	7.2 mm 9/32 inch
	Wear layer	0.6 mm
	Click system	UNICLIC ®
Box	Boards	11
	Surface area	2.514 m ² 27.06 sq.ft
	Weight	16.30 kg
Finish	Bevel	Maxi +/- 1,5 mm - Mini +/- 0,5 mm 4
	Gloss	Super matt (3%)
	Structure	Brushed

Walnuts

Smoked Walnut PRB203

Frozen Walnut

Stardust Walnut

Character Woods

Cotton Triba

Jatoba

Bamboo Steamed

Teak

Rosewood Santos

BOARD FLOOR 0.6 MM		BOARD FLOOR 2 MM	PATTERN FLOOR 0.6 MM
 <p>Lounge 06</p>		 <p>Deluxe+ 06</p>	 <p>Summit 06</p>
			
			
			
			
<p>1203 × 124 mm 47-3/8 × 4-7/8 inch</p>		<p>1810 × 166 mm 71-1/4 × 6-1/2 inch</p>	
<p>8.3 mm 5/16 inch</p>		<p>10 mm 3/8 inch</p>	
<p>0.6 mm</p>		<p>0.6 mm</p>	
<p>UNICLIC[®]</p>		<p>UNIFIT[®]</p>	
<p>11</p>		<p>7</p>	
<p>1.641 m² 17.66 sq.ft</p>		<p>2.103 m² 22.64 sq.ft</p>	
<p>11.75 kg</p>		<p>17.70 kg</p>	
<p>-</p>		<p>2</p>	
<p>4</p>		<p>2</p>	
<p>Super matt (3%)</p>		<p>Super matt (3%)</p>	
<p>Brushed</p>		<p>Brushed</p>	
<p>Satin (20%)</p>			
<p>Sealed</p>			
<p>LOB203</p>		<p>DEXB+203</p>	
		<p>SUXB203</p>	
		<p>SUXB218</p>	
		<p>SUXB219</p>	
<p>LOB315</p>			
<p>LOS308</p>			
<p>LOS307</p>			
<p>LOS304</p>			
<p>LOS306</p>			
		<p>CX20B203</p>	
		<p>SWXB203</p>	

These handy tools make it as easy as it can be to install



You will find the installation instructions on each package, on the site and via this QR code

Installation kit

Installing Parky is easy. With our installation kit you have all the necessary tools to install your floor quickly and without damage: spacers to respect the expansion joint, a pull bar and a tapping block.



Choose the right underlay

Damp foil (150 micron, 25m²/pack)

- This damp foil serves as a vapour barrier and can only be used on Parky floors with an integrated cork layer (Deluxe+ 06 and Royal+ 20). Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Basic underlay (2 mm thick, 20m²/roll)

- This affordable and high-quality underlay guarantees a comfortable sound absorption and offers a contact sound insulation improvement of 19 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Silent underlay (2 mm thick, 20m²/roll)

- This premium underlay guarantees a maximum sound absorption and offers a contact sound insulation improvement of at least 20 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Waterproof tape



Protecting your floor against rising moisture is a must. We recommend you use Parky's tested waterproof tape to glue your underlay together. It's the only way to protect the backside of the floor.



This is how you finish your floor to the last detail

Veneer skirtings

The crowning glory: a matching wooden moulding.

Veneer skirtings dimensions:


2150 × 80 × 12 mm

84.6 × 3.2 × 15/32 inch



Paintable skirtings

Choose white paint baseboards if you want a clean, modern look. You can easily paint the baseboards in the same colour as the wall.



Paintable skirtings dimensions:

2150 × 69 × 12 mm

84.6 × 2.7 × 1/2 inch

Profiles

Wooden profile (residential applications)

This handy 3-in-1 profile is available in all Parky colours.

Particularly useful as

- End profile (jointless horizontal finish)
- Reducer profile (to bridge the gap with a lower floor)
- T-profile (expansion profile)

Dimensions profile:

2150 × 47 × 11 mm


84.6 × 1.9 × 7/16 inch



1. End profile



2. Reducer profile



3. T-profile

Aluminium profiles (commercial applications)

We developed aluminium profiles that are stronger than the wooden variant. Ideal for intensive use.

Dimensions profile:

- Connecting profile 900 × 38 mm - 35.4 × 1.5 inch
- End profile 2700 × 30 mm - 106.3 × 1.9 inch



Connecting profile



End profile

How to keep your floor in a fabulous shape

You can count on the Parky cleaner to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood.



Wood Floor Cleaner

1000 ml
Dilute the cleaner with water.
Clean your floor with a slightly damp cloth.



Ready to Use Wood Floor Cleaner

500 ml spray
This handy spray can be applied directly to your floor or cleaning cloth.

Repair Pens



Repair small scratches in a jiffy. Boxes with one or two pens are available, depending on the colour of your floor. Once repaired, no more dirt can penetrate the scratch.



Repair Wax

Using the Repair Wax you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.

Severe damage? Not a disaster

Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.

The complete manual of our maintenance products and tutorials for replacing a board can be found at www.par-ky.com



	TEST METHOD	PRO 06	LOUNGE 06
Wood veneer floor covering	EN14354/EN14352		
Domestic usage classification	EN685	Class 23	Class 23
Commercial usage classification	EN685	Class 31 (on demand class 33)	Class 33
Warranty	DECOSPAN nv	Residential use: 15 years Low commercial use: 5 years	Residential use: limited lifetime warranty Commercial use: 10 years
CE certification	EN14342	EN14342:2013	EN14342:2013
Dop n°		19005	19006

GENERAL PROPERTIES			
Moisture content	EN322	≤6 %	≤6 %
Dimensions of floor boards	EN14354	1203 x 190 x 7.2mm	1203 x 124 x 8.3 mm
Thickness of the wear layer	EN14354	0.6 mm	0.6 mm
Deviation of thickness	EN14354	≤0.5 mm	≤0.5mm
Deviation of squareness	EN324-2	≤0.2 mm	≤0.2 mm
Cup in width direction	EN14354	≤0.2 %	≤0.2 %
Flatness deviation		4%	4%
Internal bond	EN319	> 1.4 N/mm ²	> 1.4 N/mm ²
Veneer glueing adhesion	EN204/205	≥ 1 N/mm ²	≥ 1 N/mm ²
Mechanical connection system		Uniclic®	Uniclic®
Opening between elements	EN14354	≤ 0.2 mm	≤ 0.2 mm
Tensile strength on short end	ISO24334	> 2000 N/lm	> 2000 N/lm
Density	EN323/EN672	900	850
Weight/m ²		7 kg	8 kg

CLASSIFICATION PROPERTIES			
Thickness distention	EN 13329 annex G	< 13%	< 10 %
Resistance to indentation	EN 1534	≥ 30 N/mm ²	≥ 40 N/mm ²
Resistance to abrasion	EN 14354/EN112,73.XX	> 3000 rev.	> 6000 rev.
Impact resistance	EN 438-2.21EC2	> 1200 (EC2)	> 1200 (EC2)
Adhesion of the lacquer	EN ISO 2409	class < 2	class < 2
Resistance to chemical agents	EN 423/part 2	grade 4*	grade 4*

ADDITIONAL PROPERTIES			
Appearance of the lacquer	EN 438/2-5	ok	ok
Gloss	EN 2813	super matt 3% (+/- 1)	super matt 3% (+/- 1) / satin 20% (+/-5)
Hardness of the lacquer	DIN 53154	≥ 3 Newton	≥ 4 Newton
Residual indentation	EN 433	< 0.05 mm	< 0.05 mm
Impact resistance acc. to Wegner	EN 438-2/11	≥ 5 Newton	≥ 8 Newton
Elasticity of the lacquer	CEN/TC112 (Brinell)	2 Hb	2 Hb
Colour fastness	EN 105-B02	grade > 6	grade > 6
Castor chair resistance	EN 425	no visible change	no visible change
Burning cigarette	EN 438-2/30	Class 3**	Class 3**
Underfloor heating/cooling		OK	OK
Thermal resistance	EN 12667	0.053 m ² K/W	0.059 m ² K/W
Thermal conduction	EN 12667	0.14 W/mK	0.14 W/mK
Normalized impact sound pressure level	ISO 10140-3 & 717-2 (Ln,w)	55 dB	57 dB
Reduction of impact sound pressure level	ISO 10140-3 & 717-2 (ΔLw)	20 dB	18 dB
A-weighted walking noise	EN 16205:2018 (Ln,walk,A)	91 dB (A)	91 dB (A)
Loudness of reflected walking noise	EN16205:2018 Loudness RWS	68.7 sone	69.7 sone
Antistatic performance	EN 1815	< 2 kV (antistatic)	< 2 kV (antistatic)
Biological durability	EN 335-1/EN335-2	Class 1	Class 1
Well-managed forests		FSC® certified*** (optional)	FSC® certified*** (optional)
Resistance to termites		good	good
Resistance to bacteria		Ultrafresh	Ultrafresh
Recycling		ok	ok
Martindale test (scratch resistance)	EN16094	B3	B1-2

SAFETY PROPERTIES			
VOC loss	EN 664	<2.1 %	<2.1 %
VOC loss	French legislation ISO16000	A+	A+
VOS M1 EU		Pass	Pass
VOS LEED VA/CDPH		Compliant	Compliant
VOS BREEAM		Compliant	Compliant
VOS Indoor air comfort GOLD		Pass	Pass
Formaldehyde emission	E1 (EN 717-1)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)
Formaldehyde emission	E1 (EN 717-2)	Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)
Formaldehyde emission	ASTM E 1333-96	CARB 2	CARB 2
Exudation of plasticizers	EN 665	0%	0%
PCP (pentachlorophenol)	CEN/TR 14823	PCP free	PCP free
Burning cigarette	EN 438-2/30	Class 3**	Class 3**
Fire reaction and smoke generation	EN 13501-1	Class Cfl s1	Class Cfl s1
Slipping resistance (dry conditions)	DIN 51131	Class R11 (average)	Class R11 (average)
Slipping resistance (wet conditions)	EN 1339 (pendule)	Class ≥15 (USRV)	Class ≥15 (USRV)

MASTER 06	DELUXE+ 06	SUMMIT 06	SWING 06	CLASSIC 20	ROYAL+ 20
Class 23	Class 23	Class 23	Class 23	Class 22	Class 22
Class 33	Class 33	Class 33	Class 33	Class 31	Class 31
Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: 15 years Low commercial use: 5 years	Residential use: 15 years Low commercial use: 5 years
EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013
19003	19007	19004	19010	19008	19009
≤6 %	≤6 %	≤6 %	≤6 %	≤9 %	≤9 %
1506 x 166 x 10 mm	1810 x 166 x 12 mm	2050 x 233 x 10 mm	593 x 121 x 10mm	1185 x 148 x 10 mm	1935 x 195 x 12 mm
0.6 mm	0.6 mm	0.6 mm	0.6 mm	2 mm	2 mm
≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm
≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm
≤0.2 %	≤0.2 %	≤0.2 %	≤0.2 %	≤1 %	≤1 %
3%	3%	3%	3%	4%	4%
> 1.3 N/mm ²	> 1.3 N/mm ²	> 1.3 N/mm ²	> 1.3 N/mm ²	> 1.3 N/mm ²	> 1.3 N/mm ²
≥ 1 N/mm ²	≥ 1 N/mm ²	≥ 1 N/mm ²	≥ 1 N/mm ²	≥ 1 N/mm ²	≥ 1 N/mm ²
Unifit X®	Unifit X®	Unifit X®	Unifit X®	Unifit X®	Unifit X®
≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm
> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm
850	850	850	850	850	850
7 kg	10 kg	7 kg	7 kg	8 kg	10 kg
< 10 %	< 10 %	< 10 %	< 10 %	< 10 %	< 10 %
≥ 40 N/mm ²	≥ 40 N/mm ²	≥ 40 N/mm ²	≥ 40 N/mm ²	≥ 30 N/mm ²	≥ 30 N/mm ²
> 6000 rev.	> 6000 rev.	> 6000 rev.	> 6000 rev.	> 3000 rev.	> 3000 rev.
> 1200 (EC2)	> 1200 (EC2)	> 1200 (EC2)	> 1200 (EC2)		
class < 2	class < 2	class < 2	class < 2	class < 2	class < 2
grade 4*	grade 4*	grade 4*	grade 4*	grade 4*	grade 4*
ok	ok	ok	ok	ok	ok
super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)	matt 10% (+/- 5)	matt 10% (+/- 5)
≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 2 Newton	≥ 2 Newton
< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm
≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 2.5 Newton	≥ 2.5 Newton
2 Hb	2 Hb	2 Hb	2 Hb	2 Hb	2 Hb
grade > 6	grade > 6	grade > 6	grade > 6	grade > 6	grade > 6
no visible change	no visible change	no visible change	no visible change		
Class 3**	Class 3**	Class 3**	Class 3**	Class 3**	Class 3**
OK	OK	OK	OK	OK but glued	OK but glued
0.073 m ² K/W	0.109 m ² K/W	0.073 m ² K/W	0.073 m ² K/W	0.070 m ² K/W	0.100 m ² K/W
0.14 W/mK	0.11 W/mK	0.14 W/mK	0.14 W/mK	0.14 W/mK	0.11 W/mK
56 dB	60 dB	56 dB	56 dB	56 dB	57 dB
19 dB	15 dB	19 dB	19 dB	18 dB	17 dB
94 dB (A)	97 dB (A)	94 dB (A)	94 dB (A)	94 dB (A)	97 dB (A)
80.3 sone	96.1 sone	80.3 sone	80.3 sone	81.3 sone	96.7 sone
< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)
good	good	good	good	good	good
Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh
ok	ok	ok	ok	ok	ok
B1-2	B1-2	B1-2	B1-2		
<2.1 %	<2.1 %	<2.1 %	<2.1 %	<2.1 %	<2.1 %
A+	A+	A+	A+	A+	A+
Pass	Pass	Pass	Pass	Pass	Pass
Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
Pass	Pass	Pass	Pass	Pass	Pass
Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)
Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)	Class E1 (<3.5 mg/m ³ h)
CARB 2	CARB 2	CARB 2	CARB 2	CARB 2	CARB 2
0%	0%	0%	0%	0%	0%
PCP free	PCP free	PCP free	PCP free	PCP free	PCP free
Class 3**	Class 3**	Class 3**	Class 3**	Class 3**	Class 3**
Class Cfl s2	Class Cfl s1	Class Cfl s3	Class Cfl s1	Class Dfl s1	Class Dfl s1
Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)
Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)

* 1=surface destruction, 5=no visibel changes / ** class 3 = moderate change of gloss level and/or moderate brown spot / *** FSC C095327

It's good to live on wood

Choosing a floor isn't just something you use your eyes for. You have to be able to feel it and experience for yourself what the effect of each type of wood and finish is. Count on our experts, who will be happy to put their savoir-faire at your disposal to help you.



Quickly find a store near you?

Scan the code or go to
www.par-ky.com/en/dealers



Need more inspiration?

Follow us on Instagram
[@parkyfloors](https://www.instagram.com/parkyfloors) [#myPARKYfloor](https://www.instagram.com/myPARKYfloor)

PARKY[®]

Decospan nv
Industriezone Grenslan
Lageweg 33
8930 Menen - Belgium
tel +32 56 52 88 49
info@par-ky.com

© Decospan 2020 - Nothing from this brochure may be reproduced without written prior permission. Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries. Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

Proudly
made in
Belgium

a product of
DECOSPAN
Wood Solutions